


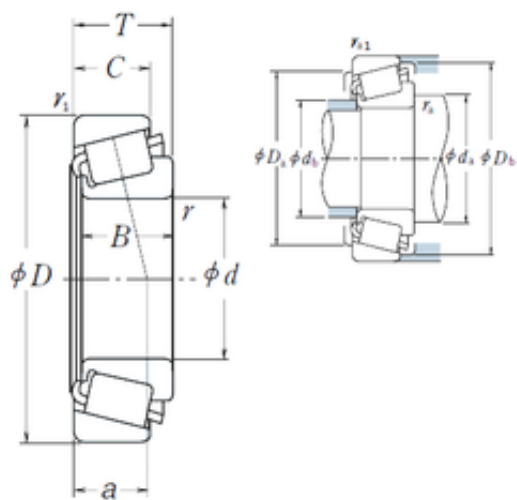

Bearing No. 3877/3820

e	0.4
d	41,275 mm
D	85,725 mm
T	30,162 mm
B	30,162 mm
C	23,812 mm
a	21,8 mm
Da	73 mm
B_	30.162
Db	81 mm
da	57 mm
Y0	0.82
db	50 mm
C0	115
D_	85.725
Z_	16
C_	23.812
Y1	1.5
DE_	73.169
SLR	21.3
D_a	73
DI_	53.948
DA1	10.618
DA2	9.138
CUP	0.285
DA_	9.882
D_b	81
RAr	152.135
SDM_	63.654
KBRG	3161

yobi	3877/3820
CONE	0.506
ALP21	30
ALP22	0
ALP23	0
BETA_	2
BET21	4
BET23	0
BET22	0
r min.	3,5 mm
LangID	1
Weight	0,791 Kg
ALPHA_	15
r1 min.	3,3 mm
ra max.	3,5 mm
Oil rpm	6000
outer r	3.3
hidYobi	3877/3820
GRS rpm	4300
inner r	3.5
hidTable	ecat_NSTPRI
inner ra	3.5
outer rb	3.3
ra1 max.	3,3 mm
Size (mm)	41.275x85.725x30.162
SHOG_yobi	3877R/3820R
Prod_Type3	TRBSR_ID_A
Width (mm)	30,162
Bearing number	3877/3820
Bore Diameter (mm)	41,275
Outer Diameter (mm)	85,725
Calculation factor (e)	0,4

(Oil) Lubrication Speed	6000 r/min
Calculation factor (Y0)	0,82
(Grease) Lubrication Speed	4300 r/min
Basic static load rating (C0)	115 kN
Basic dynamic load rating (C)	91 kN