


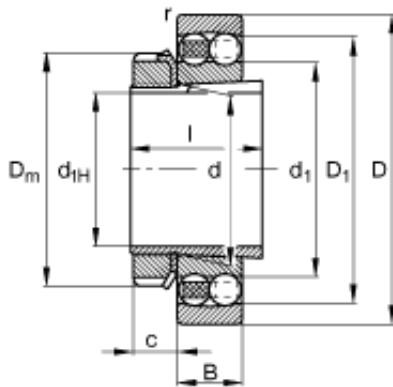

Bearing No. 1216-K-TVH-C3 + H216

	H216 / Adapter sleeve
d	80 mm
m	1,62 kg / Weight
e	0,16
D	140 mm
B	26 mm
l	46 mm
c	17 mm
Size (mm)	70x140x26
Width (mm)	26
m ₁	0,89 kg / Weight, adapter sleeve
Y ₁	3,9
d ₁	101,8 mm
Y ₂	6,03
D _m	105 mm
C _r	40000 N / Dynamic load rating (radial)
D ₁	122,1 mm
Y ₀	4,08
n _G	5000 1/min / Limiting speed
n _B	6800 1/min / Reference speed
C _{0r}	16800 N / Static load rating (radial)
Bearing number	1216-K-TVH-C3 + H216
C _{ur}	990 N / Fatigue limit load, radial
d _{1H}	70 mm
r _{a max}	2 mm

$d_{b \text{ min}}$	85 mm
$D_{a \text{ max}}$	129 mm
$B_{a \text{ min}}$	5 mm
$d_{a \text{ max}}$	91 mm
Bore Diameter (mm)	70
Outer Diameter (mm)	140