


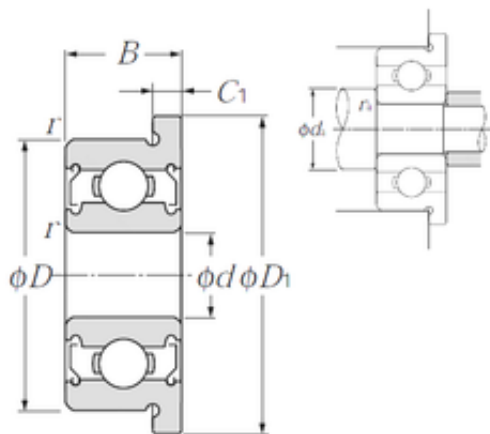

Bearing No. FL605ZZ

D	14 mm
d	5 mm
B	5 mm
C	5 mm
D1	16 mm
C1	1 mm
Noun	Bearing
Bore	0.197 Inch 5 Millimeter
Weight	3,9 Kg
da max	7,4 mm
UNSPSC	31171504
r min.	0,2 mm
ra max.	0,2 mm
series:	FL
Da max.	12,4 mm
da min.	6,6 mm
Category	Single Row Ball Bearing
Inventory	0.0
Size (mm)	5x16x5
Snap Ring	No
Enclosure	2 Metal Shields
Width (mm)	5
bore type:	Round
maximum rpm:	46000 RPM
Product Group	B00308
closure type:	Double Shielded
Inch - Metric	Metric
Cage Material	Steel
bore diameter:	5 mm
overall width:	5 mm

Keyword String	Ball
fillet radius:	0.2 mm
Other Features	16 MM Flange OD
Bearing number	FL605ZZ
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
finish/coating:	Uncoated
Manufacturer URL	http://www.ntnamerica.com
Inner Race Width	0 Inch 0 Millimeter
Outside Diameter	0.551 Inch 14 Millimeter
Outer Race Width	0.197 Inch 5 Millimeter
Long Description	5MM Bore; 14MM Outside Diameter; 5MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel
outside diameter:	14 mm
precision rating:	Not Rated
outer ring width:	5 mm
Weight / Kilogram	0.004
bearing material:	Stainless Steel
Manufacturer Name	NTN
Bore Diameter (mm)	5
Internal Clearance	C0-Medium
internal clearance:	C0
Outer Diameter (mm)	16
Minimum Buy Quantity	N/A
static load capacity:	1 kN
row type & fill slot:	Single Row Non-Fill Slot

Harmonized Tariff Code	8482.10.50.68
dynamic load capacity:	16 kN
Internal Special Features	No
(Grease) Lubrication Speed	39 000 r/min
Basic static load rating (C0)	0,505 kN
Basic dynamic load rating (C)	1,33 kN
Maximum Capacity / Filling Slot	No