


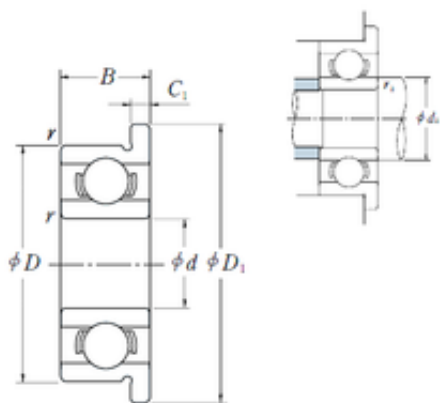

Bearing No. F698

C	2.24
r	0.3
d	8 mm
D	19 mm
B	6 mm
B0	6
D_	19
ra	0.3
Cr	228
C0	0.91
fo	12.896
da	10
C1	1,5 mm
D1	22 mm
Z_	7
B_	6
DE_	16.175
D_1	22
DA_	3.175
C_1	1.5
SRE	1.78
DI_	9.825
C0r	93
SRI	1.64
SREX	0.03
SRIX	0.015
SREN	0
SDM_	13
KBRG	6101
yobi	F698

SRIN	-0.015
mass	8.35
LangID	1
Weight	8,35 Kg
r min.	0,3 mm
hidYobi	F698
GRS rpm	36000
Oil rpm	43000
ra max.	0,3 mm
da min.	10 mm
hidTable	ecat_NSESBMF
Size (mm)	8x22x6
Prod_Type3	ESM_MD_WF_OT
Width (mm)	6
Bearing number	F698
Bore Diameter (mm)	8
Outer Diameter (mm)	22
(Grease) Lubrication Speed	36000 r/min
Basic static load rating (C0)	910 kN
Basic dynamic load rating (C)	2240 kN