


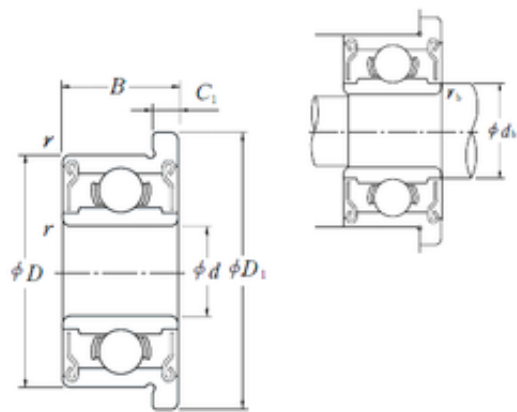

Bearing No. F699VV

C	1.72
d	9 mm
D	20 mm
B	6 mm
B1	6
db	12
Cr	175
D_	20
C0	0.84
C2	1.5
fo	14.817
B_	6
rb	0.3
C1	1,5 mm
Z_	10
D1	23 mm
D2	23
r1	0.3
DE_	16.881
D_1	23
C_1	1.5
DI_	12.119
DA_	2.381
SRE	1.33
C0r	86
SRI	1.23
SDM_	14.5
SRIX	0.01
SREX	0.02
SRIN	-0.01

KBRG	615
mass	9.51
SREN	0
yobi	F699VV
LangID	1
Weight	9,51 Kg
r min.	0,3 mm
db max.	12 mm
GRS rpm	34000
hidYobi	F699VV
rb max.	0,3 mm
hidTable	ecat_NSESBMF
Size (mm)	9x23x6
Prod_Type3	ESM_MD_WF_VV
Width (mm)	6
Bearing number	F699VV
Bore Diameter (mm)	9
Outer Diameter (mm)	23
Basic static load rating (C0)	840 kN
Basic dynamic load rating (C)	1720 kN