


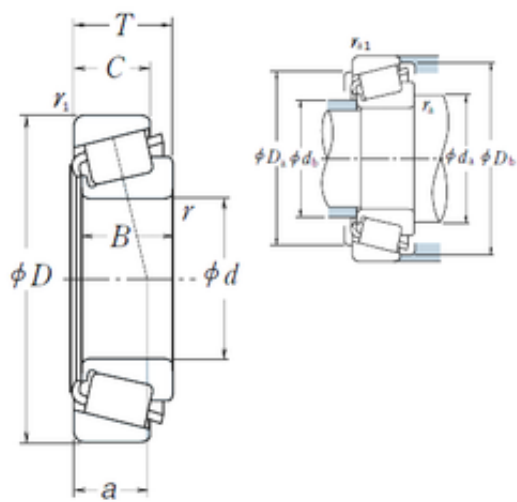

Bearing No. 65200/65500

e	0.49
d	50,8 mm
D	127 mm
T	44,45 mm
B	44,45 mm
C	34,925 mm
a	35 mm
Da	107 mm
B_	44.45
Db	119 mm
da	75 mm
Y0	0.68
db	69 mm
C0	258
D_	127
Z_	16
C_	34.925
Y1	1.2
DE_	106.065
SLR	31
D_a	107
DI_	76.292
DA1	16.892
DA2	14.114
CUP	1.03
DA_	15.513
D_b	119
RAr	187.412
SDM_	91.401
KBRG	3161

yobi	65200/65500
CONE	1.86
ALP21	36
ALP22	0
ALP23	0
BETA_	2
BET21	5
BET23	0
BET22	10
r min.	3,5 mm
LangID	1
Weight	2,89 Kg
ALPHA_	18
r1 min.	3,3 mm
ra max.	3,5 mm
Oil rpm	4000
outer r	3.3
hidYobi	65200/65500
GRS rpm	3000
inner r	3.5
hidTable	ecat_NSTPRI
inner ra	3.5
outer rb	3.3
ra1 max.	3,3 mm
Size (mm)	50.8x127x44.45
SHOG_yobi	65200R/65500R
Prod_Type3	TRBSR_ID_A
Width (mm)	44,45
Bearing number	65200/65500
Bore Diameter (mm)	50,8
Outer Diameter (mm)	127
Calculation factor (e)	0,49

(Oil) Lubrication Speed	4000 r/min
Calculation factor (Y0)	0,68
(Grease) Lubrication Speed	3000 r/min
Basic static load rating (C0)	258 kN
Basic dynamic load rating (C)	199 kN