


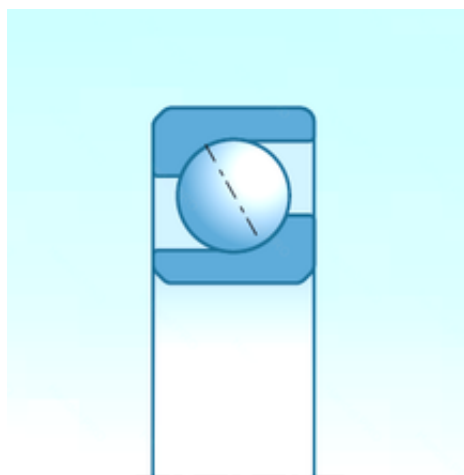

Bearing No. 7326BGM

D	280,000 mm
d	130,000 mm
B	58,000 mm
C	58,000 mm
a	115 mm
d1	188.5 mm
d2	148 mm
D1	222.5 mm
D2	264 mm
Mass	17.5 kg
Nref	2,700 rpm
Nlim	3,000 rpm
Db max	271.5 mm
Da max	262 mm
db min	148 mm
da min	148 mm
ra max	3 mm
rs min	4 mm
r1a max	1.5 mm
r1s min	1.5 mm
Size (mm)	130x280x58
Width (mm)	58,000
Bearing number	7326BGM
Dynamic load, C	271 kN
Static load, C0	302 kN
Contact angle ?	40 °
Bore Diameter (mm)	130,000
Outer Diameter (mm)	280,000
Radial clearance class	CN
Fatigue limit load, Cu	9.6 kN

Max operating temperature, Tmax	120 °C
Min operating temperature, Tmin	-40 °C
Characteristic cage frequency, FTF	0.41 Hz
Characteristic inner ring frequency, BPFI	7.07 Hz
Characteristic outer ring frequency, BPF0	4.93 Hz
Characteristic rolling element frequency, BSF	4.17 Hz