


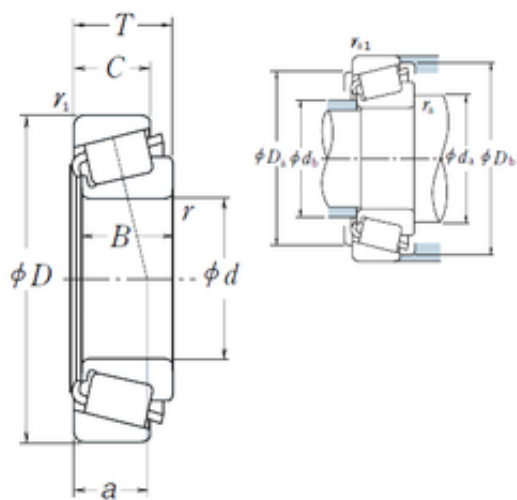

Bearing No. 39585/39520

e	0.34
d	63,5 mm
D	112,712 mm
T	30,162 mm
B	30,162 mm
C	23,812 mm
a	23,5 mm
Da	101 mm
B_	30.162
Db	107 mm
da	77 mm
Y0	0.97
db	71 mm
C0	202
D_	112.712
Z_	21
C_	23.812
Y1	1.8
DE_	101.003
SLR	23.2
D_a	101
DI_	78.18
DA1	12.246
DA2	11.069
CUP	0.359
DA_	11.66
D_b	107
RAr	240.6
SDM_	89.678
KBRG	3161

yobi	39585/39520
CONE	0.899
ALP21	25
ALP22	30
ALP23	0
BETA_	1
BET21	2
BET23	0
BET22	55
r min.	3,5 mm
LangID	1
Weight	1,258 Kg
ALPHA_	12.75
r1 min.	3,3 mm
ra max.	3,5 mm
Oil rpm	4300
outer r	3.3
hidYobi	39585/39520
GRS rpm	3200
inner r	3.5
hidTable	ecat_NSTPRI
inner ra	3.5
outer rb	3.3
ra1 max.	3,3 mm
Size (mm)	63.5x112.712x30.162
SHOG_yobi	39585R/39520R
Prod_Type3	TRBSR_ID_A
Width (mm)	30,162
Bearing number	39585/39520
Bore Diameter (mm)	63,5
Outer Diameter (mm)	112,712
Calculation factor (e)	0,34

(Oil) Lubrication Speed	4300 r/min
Calculation factor (Y0)	0,97
(Grease) Lubrication Speed	3200 r/min
Basic static load rating (C0)	202 kN
Basic dynamic load rating (C)	142 kN