


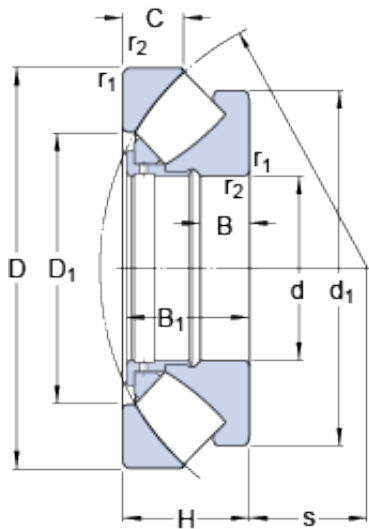

Bearing No. 292/630 EM

D	850 mm
d	630 mm
H	132 mm
B	50 mm
C	62 mm
s	338 mm
Size (mm)	850x630x132
Width (mm)	132
Mass bearing	210 kg
B ₁	127 mm
d ₁	810 mm
D ₁	723 mm
B ₁	127 mm
Limiting speed	670 r/min
Bearing number	292/630 EM
Reference speed	400 r/min
r _a max.	5 mm
D _a max.	780 mm
d _a min.	740 mm
Bore Diameter (mm)	850
Outer Diameter (mm)	630
d _a - min.	740 mm
D _a - max.	780 mm
r _a - max.	5 mm
r _{1,2} min.	6 mm
D ₁ ?	723 mm
d ₁ ?	810 mm
r _{1,2} - min.	6 mm
Factor min. axial load - A	53

Basic dynamic load rating C	4770 kN
Minimum axial load factor A	53
Basic dynamic load rating - C	4770 kN
Fatigue load limit P_u	1800 kN
Fatigue load limit - P_u	1800 kN
Basic static load rating C_0	23600 kN
Basic static load rating - C_0	23600 kN