


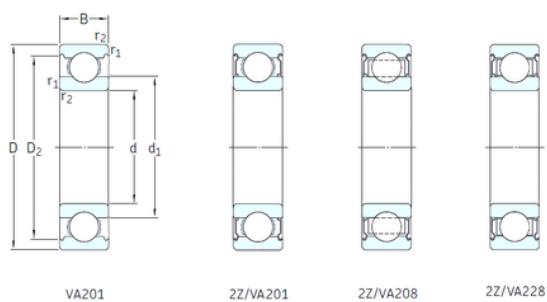

Bearing No. 6208/VA201

D	80 mm
d	40 mm
B	18 mm
C	18 mm
d1	52,6 mm
D2	69,8 mm
Noun	Bearing
Bore	1.575 Inch 40 Millimeter
Weight	0,37 Kg
UNSPSC	31171504
series:	62
r1 min.	1,1 mm
r2 min.	1,1 mm
Category	Single Row Ball Bearing
Enclosure	Open
Inventory	0.0
Size (mm)	40x80x18
Snap Ring	No
bore type:	Round
Width (mm)	18
Weight / LBS	0.807
maximum rpm:	150 RPM
Mass bearing	0.36 kg
Product Group	B00308
Cage Material	Steel
closure type:	Open
Inch - Metric	Metric
Temperature -	30 to +250 °
overall width:	18 mm

bore diameter:	40 mm
cage material:	Steel
Limiting speed	150 r/min
fillet radius:	1.1 mm
Bearing number	6208/VA201
Keyword String	Ball
Other Features	Deep Groove Extreme Temperature Variant
finish/coating:	Uncoated
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Long Description	40MM Bore; 80MM Outside Diameter; 18MM Outer Race Width; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; Polyalkylene Glycol/Graphite Mixture Filled Internal Special Features; C0-M
Manufacturer URL	http://www.skf.com
Outside Diameter	3.15 Inch 80 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Outer Race Width	0.709 Inch 18 Millimeter
Manufacturer Name	SKF
Weight / Kilogram	0.368
outer ring width:	18 mm
precision rating:	Not Rated
outside diameter:	80 mm
Internal Clearance	C0-Medium
d _a min.	47 mm
D _a max.	73 mm
r _a max.	1 mm
Bore Diameter (mm)	40

snap ring included:	Without Snap Ring
internal clearance:	C0
Outer Diameter (mm)	80
Minimum Buy Quantity	N/A
$r_{1,2}$ min.	1.1 mm
resistance features:	Corrosion Resistant, Extreme Temperature
row type & fill slot:	Single Row Non-Fill Slot
static load capacity:	19 kN
d_1 ?	52.6 mm
D_2 ?	69.8 mm
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	6208/VA201
Internal Special Features	Polyalkylene Glycol/Graphite Mixture Filled
Basic dynamic load rating C	32.5 kN
Limiting temperature T max.	250 °C
operating temperature range:	-20 to +480 °F
Basic static load rating (C0)	19 kN
Maximum Capacity / Filling Slot	No
Basic static load rating C_0	19 kN