


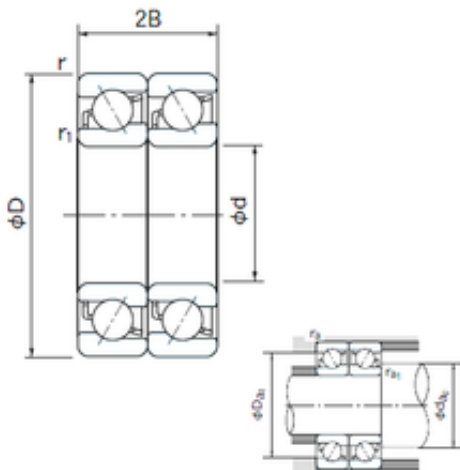

Bearing No. 7324BDT

D	260 mm
a	52.2 mm
C	55 mm
B	55 mm
d	120 mm
r1	1.1 mm
2B	110 mm
Width	55 mm
r min.	3 mm
Weight	14.2 Kg
ra max.	1 mm
r1 min.	1.1 mm
da min.	127 mm
Da max.	253 mm
ra (max)	2.5 mm
da1 (min)	134 mm
Bore Size	120 mm
Enclosure	Open
Bore Type	Cylindrical Bore
ra1 (max)	1 mm
Size (mm)	120x260x55
da2 (min)	127 mm
Da2 (max)	253 mm
Da1 (max)	246 mm
Width (mm)	55
Configuration	Duplex
Bearing number	7324BDT
Angle (?)	40 °
Outside Diameter	260 mm
Static Load Rating	505,000 N

Bore Diameter (mm)	120
Dynamic Load Rating	400,000 N
Outer Diameter (mm)	260
Limiting Speed - Oil	2,200 rpm
Fillet Radius/Chamfer	3 mm
Limiting Speed - Grease	1,700 rpm
(Grease) Lubrication Speed	1700 r/min
Basic dynamic load rating (C)	400 kN
Basic static load rating (C0)	505 kN