


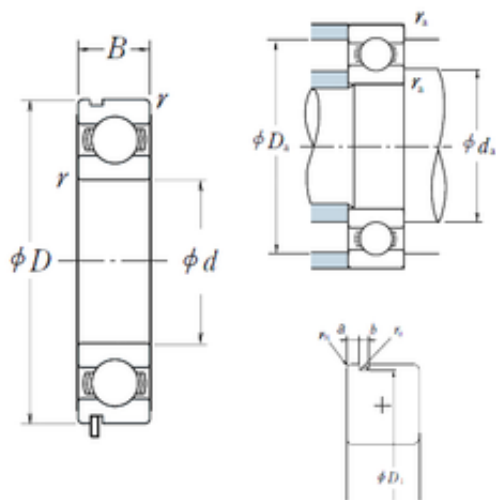

Bearing No. 6208N

a	3,28 mm
d	40 mm
D	80 mm
B	18 mm
C	18 mm
r	1.1
b	1,9 mm
Z_	9
ro	0.6
D_	80
fo	14
D1	76,81 mm
B_	18
ra	1
rn	0,5 mm
C0	17.9
D_a	73.5
DA_	11.906
SRE	6.16
DE_	71.906
DI_	48.094
SRI	6.16
mass	0.366
SREN	-0.025
Bore	1.575 Inch 40 Millimeter
SRIN	-0.025
SRIX	0.025
Noun	Bearing
bomp	0

yobi	6208N
SDM_	60
SREX	0.025
KBRG	6101
SBRG	2
LangID	1
C_conv	29100
Weight	0,366 Kg
da max	50,5 mm
r min.	1,1 mm
da min	46.5
UNSPSC	31171504
ALPHA_	0
hidYobi	6208N
GRS rpm	8500
Oil rpm	10000
Da max.	73,5 mm
ra max.	1 mm
da min.	46,5 mm
r0 max.	0,6 mm
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Size (mm)	40x80x18
Snap Ring	Yes
Inventory	0.0
Enclosure	Open
Prod_Type3	DGBB_SR_N_OT
Width (mm)	18
Weight / LBS	0.807
Inch - Metric	Metric
Cage Material	Steel
Product Group	B00308

Bearing number	6208N
Other Features	Deep Groove With Snap Ring Groove
Keyword String	Ball
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outer Race Width	0.709 Inch 18 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Long Description	40MM Bore; 80MM Outside Diameter; 18MM Outer Race Width; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage
Manufacturer URL	http://www.nskamericas.com
Outside Diameter	3.15 Inch 80 Millimeter
Weight / Kilogram	0.365
Manufacturer Name	NSK
Internal Clearance	C0-Medium
Bore Diameter (mm)	40
Outer Diameter (mm)	80
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	10 000 r/min
Internal Special Features	No
(Grease) Lubrication Speed	8 500 r/min
Basic static load rating (C0)	17,9 kN
Basic dynamic load	29,1 kN

rating (C)	
Maximum Capacity / Filling Slot	No