


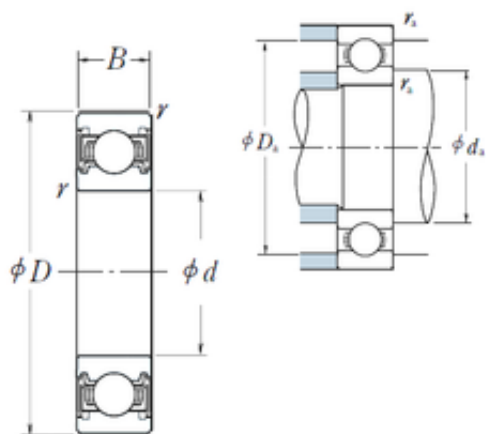

Bearing No. 6208VV

D	80 mm
d	40 mm
B	18 mm
C	18 mm
r	1.1
Z_	9
B_	18
D_	80
ra	1
C0	17.9
fo	14
DI_	48.094
SRI	6.16
D_a	73.5
DE_	71.906
DA_	11.906
SRE	6.16
SRIN	-0.025
SBRG	2
yobi	6208VV
SDM_	60
SREX	0.025
KBRG	6151
bomp	0
mass	0.366
Bore	1.575 Inch 40 Millimeter
SRIX	0.025
SREN	-0.025
Noun	Bearing

ALPHA_	0
da min	46.5
LangID	1
r min.	1,1 mm
UNSPSC	31171504
da max	50,5 mm
C_conv	29100
Weight	0,366 Kg
ra max.	1 mm
hidYobi	6208VV
GRS rpm	8500
da min.	46,5 mm
Da max.	73,5 mm
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Snap Ring	No
Size (mm)	40x80x18
Enclosure	2 Seals
Inventory	0.0
Width (mm)	18
Prod_Type3	DGBB_SR_VV
Weight / LBS	0.38
Cage Material	Steel
Product Group	B00308
Inch - Metric	Metric
Bearing number	6208VV
Keyword String	Ball
Enclosure Type	Non-Contact Seal
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outer Race Width	0.709 Inch 18 Millimeter
Outside Diameter	3.15 Inch 80 Millimeter

Long Description	40MM Bore; 80MM Outside Diameter; 18MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Manufacturer URL	http://www.nskamericas.com
Weight / Kilogram	0.17
Manufacturer Name	NSK
Internal Clearance	C0-Medium
Bore Diameter (mm)	40
Outer Diameter (mm)	80
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	6208VV
Internal Special Features	No
(Grease) Lubrication Speed	8 500 r/min
Basic static load rating (C0)	17,9 kN
Basic dynamic load rating (C)	29,1 kN
Maximum Capacity / Filling Slot	No