


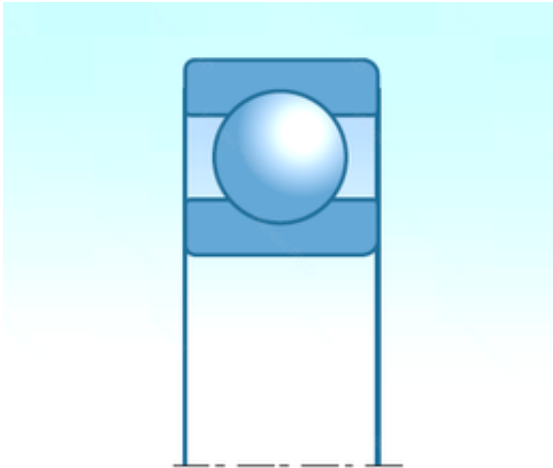

**Bearing No. 6208LHA**

|                       |                          |
|-----------------------|--------------------------|
| C                     | 18,000 mm                |
| d                     | 40,000 mm                |
| B                     | 18,000 mm                |
| D                     | 80,000 mm                |
| series:               | 62                       |
| Size (mm)             | 40x80x18                 |
| Width (mm)            | 18,000                   |
| bore type:            | Round                    |
| maximum rpm:          | 10000 RPM                |
| closure type:         | Single Seal              |
| bore diameter:        | 40 mm                    |
| fillet radius:        | 1.1 mm                   |
| overall width:        | 18 mm                    |
| cage material:        | Steel                    |
| Bearing number        | 6208LHA                  |
| finish/coating:       | Uncoated                 |
| outer ring width:     | 18 mm                    |
| inner ring width:     | 18 mm                    |
| outside diameter:     | 80 mm                    |
| bearing material:     | High Carbon Chrome Steel |
| precision rating:     | ISO Class 6              |
| maximum rpm (oil):    | 10000 rpm                |
| Bore Diameter (mm)    | 40,000                   |
| snap ring included:   | Without Snap Ring        |
| internal clearance:   | CN                       |
| Outer Diameter (mm)   | 80,000                   |
| row type & fill slot: | Single Row Non-Fill Slot |
| maximum rpm (grease): | 8700 rpm                 |
| static load capacity: | 17792 N                  |
|                       |                          |

|                              |                            |
|------------------------------|----------------------------|
| dynamic load capacity:       | 28912 N                    |
| manufacturer product page:   | <a href="#">Click here</a> |
| operating temperature range: | -40 to 120 °C              |