


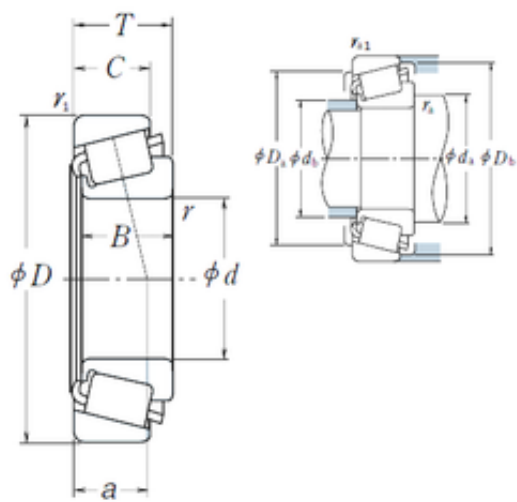

Bearing No. 6376/6320

e	0.32
d	60,325 mm
D	135,755 mm
T	53,975 mm
B	56,007 mm
C	44,45 mm
a	35 mm
Da	117 mm
B_	56.007
Db	126 mm
da	81 mm
Y0	1
db	74 mm
C0	355
D_	135.755
Z_	15
C_	44.45
Y1	1.8
DE_	115.286
SLR	41
D_a	117
DI_	81.802
DA1	17.849
DA2	15.353
CUP	1.39
DA_	17.071
D_b	126
RAr	292.251
SDM_	98.672
KBRG	3161

yobi	6376/6320
CONE	2.45
ALP21	24
ALP22	25
ALP23	0
BETA_	1
BET21	3
BET23	0
BET22	30
r min.	3,5 mm
LangID	1
Weight	3,84 Kg
ALPHA_	12.208
r1 min.	3,3 mm
ra max.	3,5 mm
Oil rpm	3800
outer r	3.3
hidYobi	6376/6320
GRS rpm	2800
inner r	3.5
hidTable	ecat_NSTPRI
inner ra	3.5
outer rb	3.3
ra1 max.	3,3 mm
Size (mm)	60.325x135.755x53.975
SHOG_yobi	6376/6320
Prod_Type3	TRBSR_ID_A
Width (mm)	53,975
Bearing number	6376/6320
Bore Diameter (mm)	60,325
Outer Diameter (mm)	135,755
Calculation factor (e)	0,32

(Oil) Lubrication Speed	3800 r/min
Calculation factor (Y0)	1
(Grease) Lubrication Speed	2800 r/min
Basic static load rating (C0)	355 kN
Basic dynamic load rating (C)	264 kN