


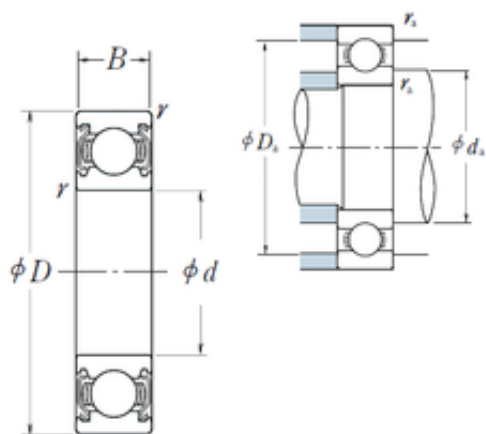

Bearing No. 6208ZZ

D	80 mm
d	40 mm
B	18 mm
C	18 mm
r	1.1
Z_	9
D_	80
B_	18
ra	1
C0	17.9
fo	14
DI_	48.094
SRI	6.16
SRE	6.16
D_a	73.5
DA_	11.906
DE_	71.906
SRIN	-0.025
Noun	Bearing
SBRG	2
yobi	6208ZZ
SDM_	60
KBRG	6141
SREX	0.025
bomp	0
mass	0.366
Bore	1.575 Inch 40 Millimeter
SRIX	0.025
SREN	-0.025

LangID	1
da min	46.5
r min.	1,1 mm
da max	50,5 mm
ALPHA_	0
C_conv	29100
UNSPSC	31171504
Weight	0,366 Kg
ra max.	1 mm
hidYobi	6208ZZ
da min.	46,5 mm
series:	62
GRS rpm	8500
Da max.	73,5 mm
hidTable	ecat_NSRDGB
Category	Single Row Ball Bearing
Inventory	0.0
Enclosure	2 Metal Shields
Size (mm)	40x80x18
Snap Ring	No
Prod_Type3	DGBB_SR_ZZ
Width (mm)	18
bore type:	Round
Weight / LBS	0.803
maximum rpm:	10000 RPM
closure type:	Double Shielded
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
Bearing number	6208ZZ
Keyword String	Ball
fillet radius:	1.1 mm

cage material:	Steel
overall width:	18 mm
bore diameter:	40 mm
Precision Class	ABEC 1 ISO P0
finish/coating:	Uncoated
Rolling Element	Ball Bearing
Manufacturer URL	http://www.nskamericas.com
Long Description	40MM Bore; 80MM Outside Diameter; 18MM Outer Race Diameter; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Outer Race Width	0.709 Inch 18 Millimeter
Outside Diameter	3.15 Inch 80 Millimeter
Manufacturer Name	NSK
Weight / Kilogram	0.37
outside diameter:	80 mm
outer ring width:	18 mm
precision rating:	ABEC 1 (ISO Class Normal)
Internal Clearance	C0-Medium
Bore Diameter (mm)	40
internal clearance:	C0
Outer Diameter (mm)	80
Minimum Buy Quantity	N/A
row type & fill slot:	Single Row Non-Fill Slot
static load capacity:	17900 N
Harmonized Tariff Code	8482.10.50.68
dynamic load capacity:	29100 N
Manufacturer Item	6208ZZ

Number	
Internal Special Features	No
(Grease) Lubrication Speed	8 500 r/min
operating temperature range:	-10 to +110 °C
Basic static load rating (C0)	17,9 kN
Basic dynamic load rating (C)	29,1 kN
Maximum Capacity / Filling Slot	No