


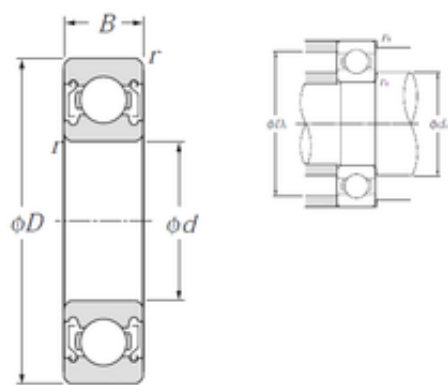

Bearing No. 6208ZZ

D	80 mm
d	40 mm
B	18 mm
C	18 mm
rn	0,5 mm
Noun	Bearing
Bore	1.575 Inch 40 Millimeter
UNSPSC	31171504
da max	51 mm
Weight	0,366 Kg
r min.	1,1 mm
da min.	46,5 mm
Da max.	73,5 mm
ra max.	1 mm
series:	62
Category	Single Row Ball Bearing
Size (mm)	40x80x18
Enclosure	2 Metal Shields
Inventory	0.0
Snap Ring	No
bore type:	Round
Width (mm)	18
Weight / LBS	0.807
maximum rpm:	10000 RPM
closure type:	Double Shielded
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
Keyword String	Ball

Other Features	Deep Groove Shell Alvania Prelubricated
Bearing number	6208ZZ
bore diameter:	40 mm
overall width:	18 mm
cage material:	Steel
fillet radius:	1.1 mm
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
finish/coating:	Uncoated
Inner Race Width	0 Inch 0 Millimeter
Outside Diameter	3.15 Inch 80 Millimeter
Outer Race Width	0.709 Inch 18 Millimeter
Long Description	40MM Bore; 80MM Outside Diameter; 18MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Stee
Manufacturer URL	http://www.ntnamerica.com
outside diameter:	80 mm
outer ring width:	18 mm
inner ring width:	18 mm
Manufacturer Name	NTN
Weight / Kilogram	0
bearing material:	High Carbon Chrome Steel
precision rating:	ISO Class 0
Bore Diameter (mm)	40
Internal Clearance	C0-Medium

Outer Diameter (mm)	80
snap ring included:	Without Snap Ring
internal clearance:	CN
Minimum Buy Quantity	N/A
static load capacity:	17800 N
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm (grease):	8700 rpm
Harmonized Tariff Code	8482.10.50.68
dynamic load capacity:	29100 N
Manufacturer Item Number	6208ZZ/2AU1
Internal Special Features	No
manufacturer product page:	Click here
(Grease) Lubrication Speed	8 700 r/min
operating temperature range:	-40 to 120 °C
Basic dynamic load rating (C)	29,1 kN
Basic static load rating (C0)	17,8 kN
Maximum Capacity / Filling Slot	No