


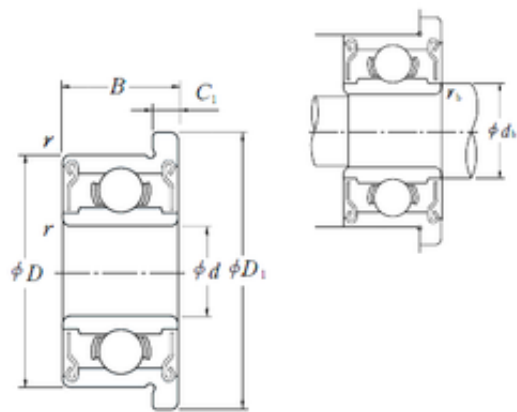

Bearing No. F687VV

|      |        |
|------|--------|
| C    | 1.17   |
| d    | 7 mm   |
| D    | 14 mm  |
| B    | 5 mm   |
| B1   | 5      |
| db   | 8.5    |
| Cr   | 120    |
| D_   | 14     |
| C0   | 0.51   |
| C2   | 1.1    |
| fo   | 14.167 |
| B_   | 5      |
| rb   | 0.15   |
| C1   | 1,1 mm |
| Z_   | 9      |
| D1   | 16 mm  |
| D2   | 16     |
| r1   | 0.15   |
| DE_  | 12.5   |
| D_1  | 16     |
| C_1  | 1.1    |
| DI_  | 8.5    |
| DA_  | 2      |
| SRE  | 1.12   |
| C0r  | 52     |
| SRI  | 1.12   |
| SDM_ | 10.5   |
| SRIX | 0.02   |
| SREX | 0.02   |
| SRIN | 0      |
|      |        |

|                               |              |
|-------------------------------|--------------|
| KBRG                          | 615          |
| mass                          | 3.37         |
| SREN                          | 0            |
| yobi                          | F687VV       |
| LangID                        | 1            |
| Weight                        | 3,37 Kg      |
| r min.                        | 0,15 mm      |
| db max.                       | 8,5 mm       |
| GRS rpm                       | 40000        |
| hidYobi                       | F687VV       |
| rb max.                       | 0,15 mm      |
| hidTable                      | ecat_NSESBMF |
| Size (mm)                     | 7x16x5       |
| Prod_Type3                    | ESM_MD_WF_VV |
| Width (mm)                    | 5            |
| Bearing number                | F687VV       |
| Bore Diameter (mm)            | 7            |
| Outer Diameter (mm)           | 16           |
| Basic static load rating (C0) | 510 kN       |
| Basic dynamic load rating (C) | 1170 kN      |