


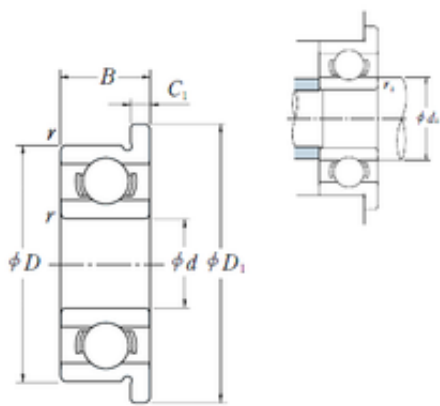

Bearing No. F686A

C	1.08
r	0.15
d	6 mm
D	13 mm
B	3,5 mm
B0	3.5
D_	13
ra	0.15
Cr	110
C0	0.44
fo	13.75
da	7.2
C1	1 mm
D1	15 mm
Z_	8
B_	3.5
DE_	11.5
D_1	15
DA_	2
C_1	1
SRE	1.12
DI_	7.5
C0r	45
SRI	1.04
SREX	0.02
SRIX	0.02
SREN	0
SDM_	9.5
KBRG	6101
yobi	F686A

SRIN	0
mass	2.25
LangID	1
Weight	2,25 Kg
r min.	0,15 mm
hidYobi	F686A
GRS rpm	40000
Oil rpm	50000
ra max.	0,15 mm
da min.	7,2 mm
hidTable	ecat_NSESBMF
Size (mm)	6x15x3.5
Prod_Type3	ESM_MD_WF_OT
Width (mm)	3,5
Bearing number	F686A
Bore Diameter (mm)	6
Outer Diameter (mm)	15
(Grease) Lubrication Speed	40000 r/min
Basic static load rating (C0)	440 kN
Basic dynamic load rating (C)	1080 kN