


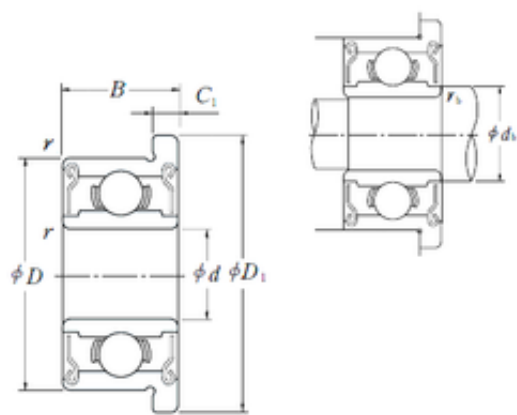

Bearing No. F686AZZ

C	1.08
d	6 mm
D	13 mm
B	5 mm
B1	5
db	7.4
Cr	110
D_	13
C0	0.44
C2	1.1
fo	13.75
B_	5
rb	0.15
C1	1,1 mm
Z_	8
D1	15 mm
D2	15
r1	0.15
DE_	11.5
D_1	15
C_1	1.1
DI_	7.5
DA_	2
SRE	1.12
C0r	45
SRI	1.04
SDM_	9.5
SRIX	0.02
SREX	0.02
SRIN	0

KBRG	6141
mass	3.04
SREN	0
yobi	F686AZZ
LangID	1
Weight	3,04 Kg
r min.	0,15 mm
db max.	7,4 mm
GRS rpm	40000
hidYobi	F686AZZ
rb max.	0,15 mm
hidTable	ecat_NSESBMF
Size (mm)	6x15x5
Prod_Type3	ESM_MD_WF_ZZ
Width (mm)	5
Bearing number	F686AZZ
Bore Diameter (mm)	6
Outer Diameter (mm)	15
Basic static load rating (C0)	440 kN
Basic dynamic load rating (C)	1080 kN