


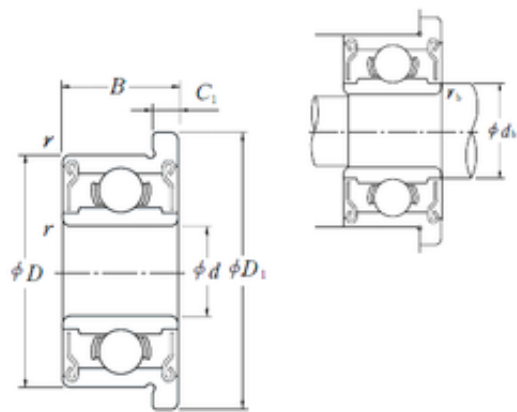

Bearing No. F685ZZ

|      |         |
|------|---------|
| C    | 0.715   |
| d    | 5 mm    |
| D    | 11 mm   |
| B    | 5 mm    |
| B1   | 5       |
| db   | 6.2     |
| Cr   | 73      |
| D_   | 11      |
| C0   | 0.281   |
| C2   | 1       |
| fo   | 13.929  |
| B_   | 5       |
| rb   | 0.15    |
| C1   | 1 mm    |
| Z_   | 8       |
| D1   | 12,5 mm |
| D2   | 12.5    |
| r1   | 0.15    |
| DE_  | 9.588   |
| D_1  | 12.5    |
| C_1  | 1       |
| DI_  | 6.412   |
| DA_  | 1.588   |
| SRE  | 0.89    |
| C0r  | 29      |
| SRI  | 0.89    |
| SDM_ | 8       |
| SRIX | 0.02    |
| SREX | 0.02    |
| SRIN | 0       |
|      |         |

|                               |              |
|-------------------------------|--------------|
| KBRG                          | 6141         |
| mass                          | 2.18         |
| SREN                          | 0            |
| yobi                          | F685ZZ       |
| LangID                        | 1            |
| Weight                        | 2,18 Kg      |
| r min.                        | 0,15 mm      |
| db max.                       | 6,2 mm       |
| GRS rpm                       | 45000        |
| hidYobi                       | F685ZZ       |
| rb max.                       | 0,15 mm      |
| hidTable                      | ecat_NSESBMF |
| Size (mm)                     | 5x12.5x5     |
| Prod_Type3                    | ESM_MD_WF_ZZ |
| Width (mm)                    | 5            |
| Bearing number                | F685ZZ       |
| Bore Diameter (mm)            | 5            |
| Outer Diameter (mm)           | 12,5         |
| Basic static load rating (C0) | 281 kN       |
| Basic dynamic load rating (C) | 715 kN       |