


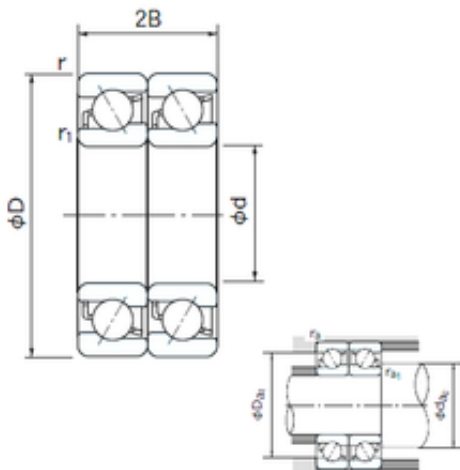

Bearing No. 7207CDT

C	17 mm
d	35 mm
B	17 mm
D	72 mm
r1	0.6 mm
2B	34 mm
a -	2.8 mm
Width	17 mm
r min.	1.1 mm
Weight	0.295 Kg
ra max.	0.6 mm
r1 min.	0.6 mm
da min.	42 mm
Da max.	67 mm
ra (max)	1 mm
da1 (min)	42 mm
Bore Size	35 mm
Enclosure	Open
Bore Type	Cylindrical Bore
ra1 (max)	0.6 mm
Size (mm)	35x72x17
da2 (min)	42 mm
Da2 (max)	67 mm
Da1 (max)	65 mm
Width (mm)	17
Configuration	Duplex
Bearing number	7207CDT
Angle (?)	15 °
Outside Diameter	72 mm
Static Load Rating	40,000 N

Bore Diameter (mm)	35
Dynamic Load Rating	49,500 N
Outer Diameter (mm)	72
Limiting Speed - Oil	17,000 rpm
Fillet Radius/Chamfer	1.1 mm
Limiting Speed - Grease	12,000 rpm
(Grease) Lubrication Speed	12000 r/min
Basic dynamic load rating (C)	49,5 kN
Basic static load rating (C0)	40 kN