


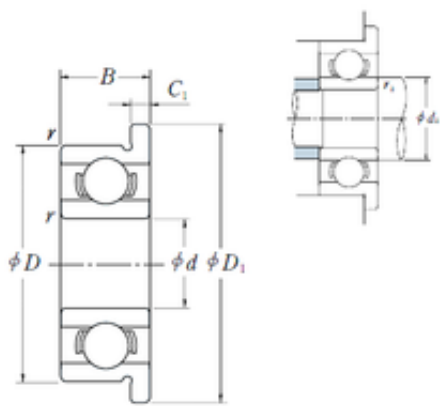

Bearing No. F681X

C	0.112
r	0.05
d	1,5 mm
D	4 mm
B	1,2 mm
B0	1.2
D_	4
ra	0.05
Cr	11
C0	0.033
fo	13.095
da	1.9
C1	0,4 mm
D1	5 mm
Z_	7
B_	1.2
DE_	3.2
D_1	5
DA_	0.6
C_1	0.4
SRE	0.34
DI_	2
C0r	3.5
SRI	0.32
SREX	0.01
SRIX	0.01
SREN	0
SDM_	2.6
KBRG	6102
yobi	F681X

SRIN	0
mass	0.09
LangID	1
Weight	0,09 Kg
r min.	0,05 mm
hidYobi	F681X
GRS rpm	100000
Oil rpm	120000
ra max.	0,05 mm
da min.	1,9 mm
hidTable	ecat_NSESBMF
Size (mm)	1.5x5x1.2
Prod_Type3	ESM_MD_WF_OT
Width (mm)	1,2
Bearing number	F681X
Bore Diameter (mm)	1,5
Outer Diameter (mm)	5
(Grease) Lubrication Speed	100000 r/min
Basic static load rating (C0)	33 kN
Basic dynamic load rating (C)	112 kN