


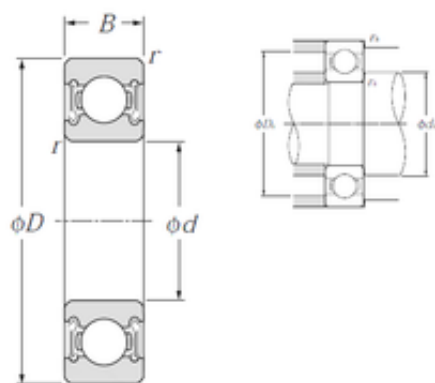

Bearing No. 6210LLB

D	90 mm
d	50 mm
B	20 mm
C	20 mm
Bore	1.969 Inch 50 Millimeter
Noun	Bearing
da max	60 mm
UNSPSC	31171504
Weight	0,454 Kg
r min.	1,1 mm
da min.	56,5 mm
Da max.	83,5 mm
ra max.	1 mm
series:	62
Category	Single Row Ball Bearing
Inventory	0.0
Size (mm)	50x90x20
Enclosure	2 Seals
Snap Ring	No
bore type:	Round
Width (mm)	20
Weight / LBS	1.1168
maximum rpm:	8300 RPM
closure type:	Double Sealed
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
Other Features	Deep Groove Non-Friction Nitrile Rubber Seal

Enclosure Type	Non-Contact Seal
Keyword String	Ball
Bearing number	6210LLB
bore diameter:	50 mm
overall width:	20 mm
cage material:	Steel
fillet radius:	1.1 mm
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
finish/coating:	Uncoated
Inner Race Width	0 Inch 0 Millimeter
Outer Race Width	0.787 Inch 20 Millimeter
Outside Diameter	3.543 Inch 90 Millimeter
Long Description	50MM Bore; 90MM Outside Diameter; 20MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage;
Manufacturer URL	http://www.ntnamerica.com
bearing material:	High Carbon Chrome Steel
outside diameter:	90 mm
inner ring width:	20 mm
Manufacturer Name	NTN
Weight / Kilogram	0.458
outer ring width:	20 mm
precision rating:	ISO Class 0
Bore Diameter (mm)	50

Internal Clearance	C0-Medium
snap ring included:	Without Snap Ring
Outer Diameter (mm)	90
internal clearance:	CN
Minimum Buy Quantity	N/A
static load capacity:	23200 N
maximum rpm (grease):	7100 rpm
row type & fill slot:	Single Row Non-Fill Slot
dynamic load capacity:	35000 N
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	6210LLB
Internal Special Features	No
manufacturer product page:	Click here
(Grease) Lubrication Speed	7 100 r/min
operating temperature range:	-40 to 120 °C
Basic dynamic load rating (C)	35 kN
Basic static load rating (C0)	23,2 kN
Maximum Capacity / Filling Slot	No