


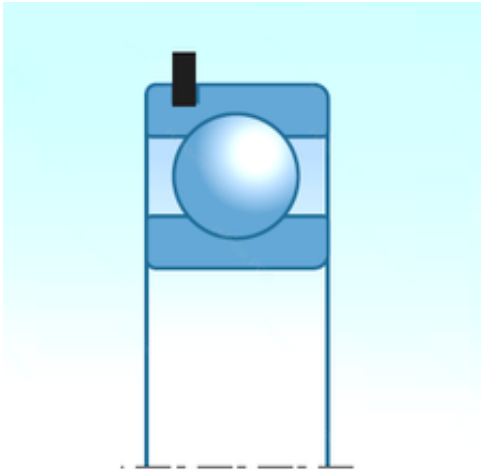

Bearing No. 6210LLBNR

C	20,000 mm
d	50,000 mm
D	90,000 mm
B	20,000 mm
Bore	1.969 Inch 50 Millimeter
Noun	Bearing
UNSPSC	31171504
series:	62
Category	Single Row Ball Bearing
Snap Ring	Yes
Inventory	0.0
Enclosure	2 Seals
Size (mm)	50x90x20
Width (mm)	20,000
bore type:	Round
maximum rpm:	8300 RPM
Weight / LBS	1.02
Inch - Metric	Metric
Cage Material	Steel
closure type:	Double Sealed
Product Group	B00308
bore diameter:	50 mm
overall width:	20 mm
cage material:	Steel
fillet radius:	1.1 mm
standards met:	MIL-G-18709A
Bearing number	6210LLBNR
Keyword String	Ball
Enclosure Type	Non-Contact Seal

Rolling Element	Ball Bearing
finish/coating:	Uncoated
Precision Class	ABEC 1 ISO P0
Manufacturer URL	http://www.ntnamerica.com
Outside Diameter	3.543 Inch 90 Millimeter
Outer Race Width	0.787 Inch 20 Millimeter
Long Description	50MM Bore; 90MM Outside Diameter; 20MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features
precision rating:	ISO Class 0
Manufacturer Name	NTN
outer ring width:	20 mm
Weight / Kilogram	0.48
inner ring width:	20 mm
outside diameter:	90 mm
bearing material:	High Carbon Chrome Steel
Internal Clearance	C3-Loose
Bore Diameter (mm)	50,000
internal clearance:	CN
Outer Diameter (mm)	90,000
snap ring included:	With Snap Ring
Minimum Buy Quantity	N/A
static load capacity:	23200 N
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm (grease):	7100 rpm
dynamic load capacity:	35000 N
Harmonized Tariff Code	8482.10.50.68

Manufacturer Item Number	6210LLBNR/2A
Internal Special Features	No
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Maximum Capacity / Filling Slot	No