


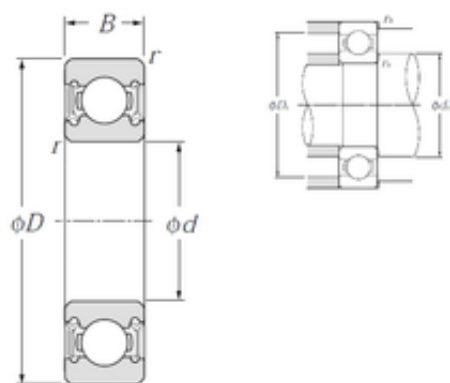

Bearing No. 6210LLU

D	90 mm
d	50 mm
B	20 mm
C	20 mm
Noun	Bearing
Bore	1.969 Inch 50 Millimeter
r min.	1,1 mm
da max	60 mm
UNSPSC	31171504
Weight	0,454 Kg
Da max.	83,5 mm
ra max.	1 mm
da min.	56,5 mm
series:	62
Category	Single Row Ball Bearing
Inventory	0.0
Enclosure	2 Seals
Snap Ring	No
Size (mm)	50x90x20
bore type:	Round
Width (mm)	20
Weight / LBS	1.01
maximum rpm:	8300 RPM
closure type:	Double Sealed
Cage Material	Steel
Product Group	B00308
Inch - Metric	Metric
Keyword String	Ball
Other Features	Deep Groove Double Lip Friction Nitrile

	Rubber Seal -20 To 120 Deg C
Enclosure Type	Contact Seal
Bearing number	6210LLU
bore diameter:	50 mm
overall width:	20 mm
cage material:	Steel
fillet radius:	1.1 mm
Rolling Element	Ball Bearing
finish/coating:	Uncoated
Precision Class	ABEC 1 ISO P0
Reference speed	4 700 r/min
Outer Race Width	0.787 Inch 20 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Outside Diameter	3.543 Inch 90 Millimeter
Long Description	50MM Bore; 90MM Outside Diameter; 20MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage;
Manufacturer URL	http://www.ntnamerica.com
inner ring width:	20 mm
Weight / Kilogram	0
outer ring width:	20 mm
Manufacturer Name	NTN
bearing material:	High Carbon Chrome Steel
outside diameter:	90 mm

precision rating:	ISO Class 0
Bore Diameter (mm)	50
Internal Clearance	C0-Medium
Outer Diameter (mm)	90
snap ring included:	Without Snap Ring
internal clearance:	CN
Minimum Buy Quantity	N/A
static load capacity:	23200 N
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm (grease):	4700 rpm
dynamic load capacity:	35000 N
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	6210LLU
Internal Special Features	No
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Basic dynamic load rating (C)	35 kN
Basic static load rating (C0)	23,2 kN
Maximum Capacity / Filling Slot	No