


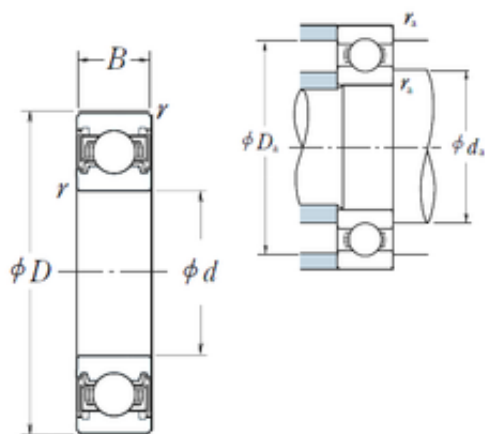

Bearing No. 6210VV

D	90 mm
d	50 mm
B	20 mm
C	20 mm
r	1.1
Z_	10
B_	20
D_	90
ra	1
C0	23.2
fo	14.4
DI_	57.3
SRI	6.57
D_a	83.5
DE_	82.7
DA_	12.7
SRE	6.57
SRIN	-0.025
SBRG	2
yobi	6210VV
SDM_	70
SREX	0.025
KBRG	6151
bomp	0
mass	0.459
Bore	1.969 Inch 50 Millimeter
SRIX	0.025
SREN	-0.025
Noun	Bearing

ALPHA_	0
da min	56.5
LangID	1
r min.	1,1 mm
UNSPSC	31171504
C_conv	35000
da max	60 mm
Weight	0,459 Kg
hidYobi	6210VV
Da max.	83,5 mm
da min.	56,5 mm
ra max.	1 mm
GRS rpm	7100
hidTable	ecat_NSRDGB
Category	Single Row Ball Bearing
Inventory	0.0
Enclosure	2 Seals
Snap Ring	No
Size (mm)	50x90x20
Width (mm)	20
Prod_Type3	DGBB_SR_VV
Weight / LBS	0.463
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
Bearing number	6210VV
Keyword String	Ball
Enclosure Type	Non-Contact Seal
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outer Race Width	0.787 Inch 20 Millimeter
Outside Diameter	3.543 Inch 90

	Millimeter
Long Description	50MM Bore; 90MM Outside Diameter; 20MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Manufacturer URL	http://www.nskamericas.com
Weight / Kilogram	0.46
Manufacturer Name	NSK
Internal Clearance	C0-Medium
Bore Diameter (mm)	50
Outer Diameter (mm)	90
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	6210VV
Internal Special Features	No
(Grease) Lubrication Speed	7 100 r/min
Basic static load rating (C0)	23,2 kN
Basic dynamic load rating (C)	35 kN
Maximum Capacity / Filling Slot	No