


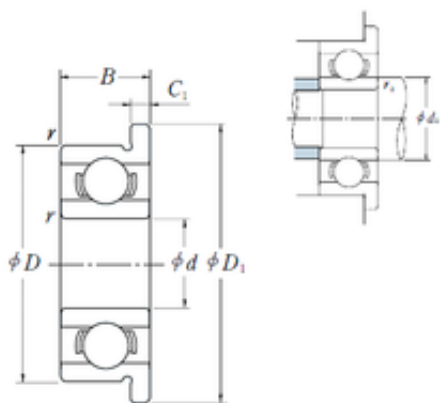

Bearing No. F627

C	3.3
r	0.3
d	7 mm
D	22 mm
B	7 mm
B0	7
D_	22
ra	0.3
Cr	335
C0	1.37
fo	12.424
da	9
C1	1,5 mm
D1	25 mm
Z_	7
B_	7
DE_	18.969
D_1	25
DA_	3.969
C_1	1.5
SRE	2.22
DI_	11.031
C0r	140
SRI	2.04
SREX	0.03
SRIX	0.015
SREN	0
SDM_	15
KBRG	6107
yobi	F627

SRIN	-0.015
mass	14.2
LangID	1
Weight	14,2 Kg
r min.	0,3 mm
hidYobi	F627
GRS rpm	30000
Oil rpm	36000
ra max.	0,3 mm
da min.	9 mm
hidTable	ecat_NSESBMF
Size (mm)	7x25x7
Prod_Type3	ESM_MD_WF_OT
Width (mm)	7
Bearing number	F627
Bore Diameter (mm)	7
Outer Diameter (mm)	25
(Grease) Lubrication Speed	30000 r/min
Basic static load rating (C0)	1370 kN
Basic dynamic load rating (C)	3300 kN