


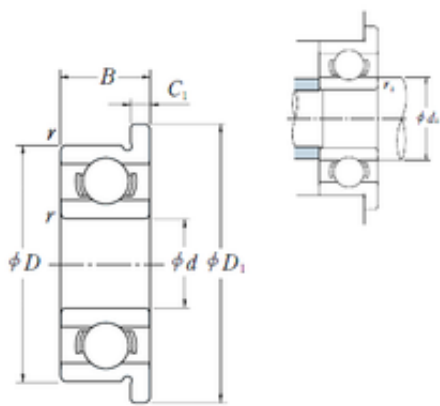

Bearing No. F624

C	1.3
r	0.2
d	4 mm
D	13 mm
B	5 mm
B0	5
D_	13
ra	0.2
Cr	133
C0	0.485
fo	12.222
da	5.6
C1	1 mm
D1	15 mm
Z_	7
B_	5
DE_	11.081
D_1	15
DA_	2.381
C_1	1
SRE	1.33
DI_	6.319
C0r	49
SRI	1.33
SREX	0.02
SRIX	0.02
SREN	0
SDM_	8.7
KBRG	6101
yobi	F624

SRIN	0
mass	3.38
LangID	1
Weight	3,38 Kg
r min.	0,2 mm
hidYobi	F624
GRS rpm	40000
Oil rpm	48000
ra max.	0,2 mm
da min.	5,6 mm
hidTable	ecat_NSESBMF
Size (mm)	4x15x5
Prod_Type3	ESM_MD_WF_OT
Width (mm)	5
Bearing number	F624
Bore Diameter (mm)	4
Outer Diameter (mm)	15
(Grease) Lubrication Speed	40000 r/min
Basic static load rating (C0)	485 kN
Basic dynamic load rating (C)	1300 kN