


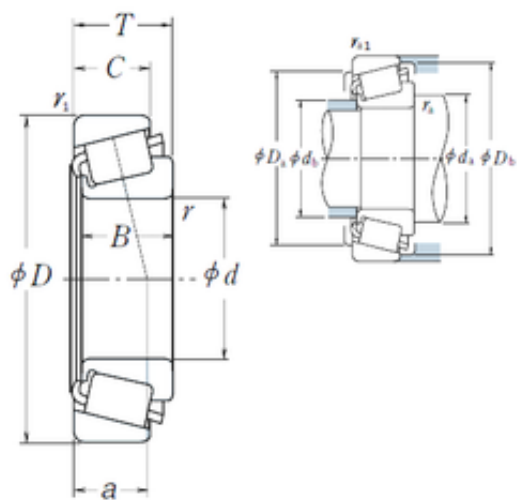

Bearing No. 42381/42587

e	0.49
d	96,838 mm
D	149,225 mm
T	31,75 mm
B	28,971 mm
C	24,606 mm
a	34,9 mm
Da	135 mm
B_	28.971
Db	143 mm
da	111 mm
Y0	0.67
db	105 mm
C0	218
D_	149.225
Z_	26
C_	24.606
Y1	1.2
DE_	132.255
SLR	20
D_a	135
DI_	110.205
DA1	12.323
DA2	11.222
CUP	0.711
DA_	11.775
D_b	143
RAr	223
SDM_	121.584
KBRG	3161

yobi	42381/42587
CONE	1.13
ALP21	36
ALP22	20
ALP23	0
BETA_	1
BET21	3
BET23	0
BET22	10
r min.	3,5 mm
LangID	1
Weight	1,841 Kg
ALPHA_	18.167
r1 min.	3,3 mm
ra max.	3,5 mm
Oil rpm	3000
outer r	3.3
hidYobi	42381/42587
GRS rpm	2200
inner r	3.5
hidTable	ecat_NSTPRI
inner ra	3.5
outer rb	3.3
ra1 max.	3,3 mm
Size (mm)	96.838x149.225x31.75
SHOG_yobi	42381R/42587R
Prod_Type3	TRBSR_ID_A
Width (mm)	31,75
Bearing number	42381/42587
Bore Diameter (mm)	96,838
Outer Diameter (mm)	149,225
Calculation factor (e)	0,49

(Oil) Lubrication Speed	3000 r/min
Calculation factor (Y0)	0,67
(Grease) Lubrication Speed	2200 r/min
Basic static load rating (C0)	218 kN
Basic dynamic load rating (C)	140 kN