


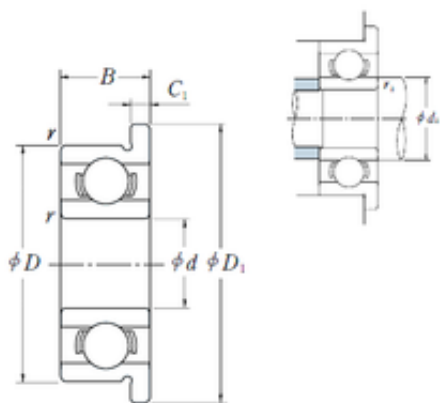

Bearing No. F625

C	1.73
r	0.3
d	5 mm
D	16 mm
B	5 mm
B0	5
D_	16
ra	0.3
Cr	177
C0	0.67
fo	12.403
da	7
C1	1 mm
D1	18 mm
Z_	7
B_	5
DE_	13.278
D_1	18
DA_	2.778
C_1	1
SRE	1.56
DI_	7.722
C0r	6
SRI	1.5
SREX	0.02
SRIX	0.02
SREN	0
SDM_	10.5
KBRG	6101
yobi	F625

SRIN	0
mass	5.37
LangID	1
Weight	5,37 Kg
r min.	0,3 mm
hidYobi	F625
GRS rpm	36000
Oil rpm	43000
ra max.	0,3 mm
da min.	7 mm
hidTable	ecat_NSESBMF
Size (mm)	5x18x5
Prod_Type3	ESM_MD_WF_OT
Width (mm)	5
Bearing number	F625
Bore Diameter (mm)	5
Outer Diameter (mm)	18
(Grease) Lubrication Speed	36000 r/min
Basic static load rating (C0)	670 kN
Basic dynamic load rating (C)	1730 kN