


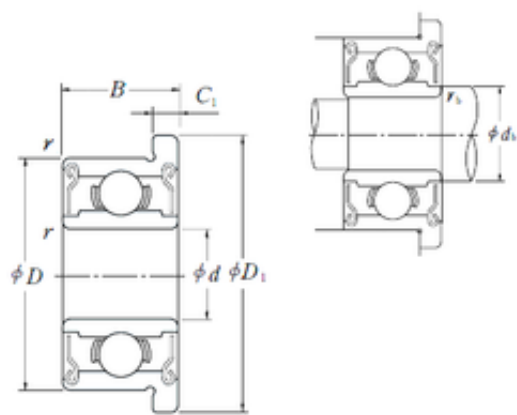

Bearing No. F625VV

C	1.73
d	5 mm
D	16 mm
B	5 mm
B1	5
db	7.5
Cr	177
D_	16
C0	0.67
C2	1
fo	12.403
B_	5
rb	0.3
C1	1 mm
Z_	7
D1	18 mm
D2	18
r1	0.3
DE_	13.278
D_1	18
C_1	1
DI_	7.722
DA_	2.778
SRE	1.56
C0r	6
SRI	1.5
SDM_	10.5
SRIX	0.02
SREX	0.02
SRIN	0

KBRG	6151
mass	5.3
SREN	0
yobi	F625VV
LangID	1
Weight	5,27 Kg
r min.	0,3 mm
db max.	7,5 mm
GRS rpm	36000
hidYobi	F625VV
rb max.	0,3 mm
hidTable	ecat_NSESBMF
Size (mm)	5x18x5
Prod_Type3	ESM_MD_WF_VV
Width (mm)	5
Bearing number	F625VV
Bore Diameter (mm)	5
Outer Diameter (mm)	18
Basic static load rating (C0)	670 kN
Basic dynamic load rating (C)	1730 kN