


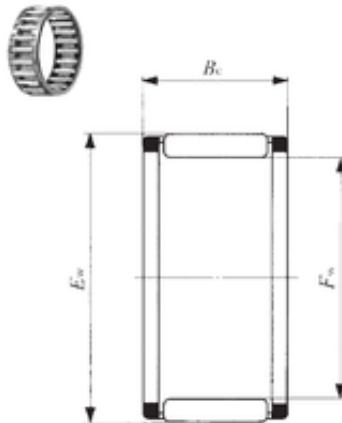

#### Bearing No. KT 505830

|                  |                                                         |
|------------------|---------------------------------------------------------|
| Bc               | 30 mm                                                   |
| Fw               | 50 mm                                                   |
| Ew               | 58 mm                                                   |
| Noun             | Roller Assembly                                         |
| Bore             | 1.969 Inch   50<br>Millimeter                           |
| Width            | 1.181 Inch   30<br>Millimeter                           |
| Weight           | 0,0965 Kg                                               |
| UNSPSC           | 31171512                                                |
| Category         | Needle Non Thrust<br>Roller Bearing                     |
| Retainer         | Yes                                                     |
| Enclosure        | Not Applicable                                          |
| Inventory        | 0.0                                                     |
| Separable        | No                                                      |
| Component        | Roller Assembly Only                                    |
| Closed End       | Not Applicable                                          |
| Weight / LBS     | 0.213                                                   |
| Inch - Metric    | Metric                                                  |
| Self Aligning    | No                                                      |
| Product Group    | B04144                                                  |
| Bearing number   | KT 505830                                               |
| Keyword String   | Bearing Needle                                          |
| Thrust Bearing   | No                                                      |
| Other Features   | C3 Clearance                                            |
| Rolling Element  | Needle Roller Bearing                                   |
| Outside Diameter | 2.283 Inch   58<br>Millimeter                           |
| Manufacturer URL | <a href="http://www.ikont.com">http://www.ikont.com</a> |
| Long Description | 50MM Bore; 58MM<br>Outside Diameter;                    |

|                               |                                                                                                                            |
|-------------------------------|----------------------------------------------------------------------------------------------------------------------------|
|                               | 30MM Width; Needle Roller Bearing; Roller Assembly Only; Not Self Aligning; Retainer; Single Row of Rollers; Not Separable |
| Manufacturer Name             | IKO                                                                                                                        |
| Weight / Kilogram             | 0.1                                                                                                                        |
| Bore Diameter (mm)            | 50                                                                                                                         |
| Outer Diameter (mm)           | 58                                                                                                                         |
| Minimum Buy Quantity          | N/A                                                                                                                        |
| Harmonized Tariff Code        | 8482.99.65.30                                                                                                              |
| Manufacturer Item Number      | KT505830C3                                                                                                                 |
| Number of Rows of Rollers     | Single Row                                                                                                                 |
| Basic static load rating (C0) | 97,8 kN                                                                                                                    |
| Basic dynamic load rating (C) | 51,7 kN                                                                                                                    |