


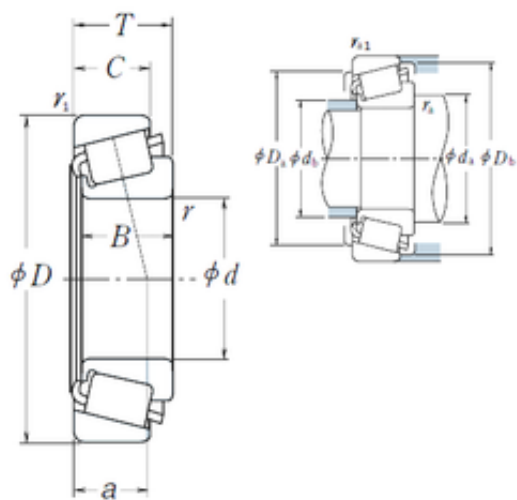

Bearing No. 580/572

e	0.4
d	82,55 mm
D	139,992 mm
T	36,512 mm
B	36,098 mm
C	28,575 mm
a	31,1 mm
Da	125 mm
B_	36.098
Db	133 mm
da	98 mm
Y0	0.82
db	91 mm
C0	260
D_	139.992
Z_	22
C_	28.575
Y1	1.5
DE_	122.671
SLR	25.25
D_a	125
DI_	97.347
DA1	13.751
DA2	12.361
CUP	0.788
DA_	13.059
D_b	133
RAr	248.844
SDM_	110.155
KBRG	3161

yobi	580/572
CONE	1.39
ALP21	30
ALP22	8
ALP23	0
BETA_	1
BET21	3
BET23	0
BET22	10
r min.	3,5 mm
LangID	1
Weight	2,178 Kg
ALPHA_	15.067
r1 min.	3,3 mm
ra max.	3,5 mm
Oil rpm	3400
outer r	3.3
hidYobi	580/572
GRS rpm	2600
inner r	3.5
hidTable	ecat_NSTPRI
inner ra	3.5
outer rb	3.3
ra1 max.	3,3 mm
Size (mm)	82.55x139.992x36.512
SHOG_yobi	580R/572R
Prod_Type3	TRBSR_ID_A
Width (mm)	36,512
Bearing number	580/572
Bore Diameter (mm)	82,55
Outer Diameter (mm)	139,992
Calculation factor (e)	0,4

(Oil) Lubrication Speed	3400 r/min
Calculation factor (Y0)	0,82
(Grease) Lubrication Speed	2600 r/min
Basic static load rating (C0)	260 kN
Basic dynamic load rating (C)	175 kN