


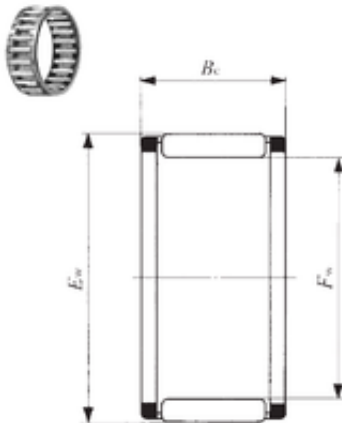

Bearing No. KT 6910

|                  |                                                                           |
|------------------|---------------------------------------------------------------------------|
| Bc               | 10 mm                                                                     |
| Fw               | 6 mm                                                                      |
| Ew               | 9 mm                                                                      |
| Noun             | Roller Assembly                                                           |
| Bore             | 0.236 Inch   6 Millimeter                                                 |
| Width            | 0.394 Inch   10 Millimeter                                                |
| Weight           | 0,00145 Kg                                                                |
| UNSPSC           | 31171512                                                                  |
| Category         | Needle Non Thrust Roller Bearing                                          |
| Retainer         | Yes                                                                       |
| Enclosure        | Not Applicable                                                            |
| Inventory        | 0.0                                                                       |
| Separable        | No                                                                        |
| Component        | Roller Assembly Only                                                      |
| Closed End       | Not Applicable                                                            |
| Weight / LBS     | 0.003                                                                     |
| Inch - Metric    | Metric                                                                    |
| Self Aligning    | No                                                                        |
| Product Group    | B04144                                                                    |
| Bearing number   | KT 6910                                                                   |
| Keyword String   | Bearing Needle                                                            |
| Thrust Bearing   | No                                                                        |
| Other Features   | C3 Clearance                                                              |
| Rolling Element  | Needle Roller Bearing                                                     |
| Outside Diameter | 0.354 Inch   9 Millimeter                                                 |
| Manufacturer URL | <a href="http://www.ikont.com">http://www.ikont.com</a>                   |
| Long Description | 6MM Bore; 9MM Outside Diameter; 10MM Width; Needle Roller Bearing; Roller |

|                                  |                                                                                           |
|----------------------------------|-------------------------------------------------------------------------------------------|
|                                  | Assembly Only; Not Self<br>Aligning; Retainer;<br>Single Row of Rollers;<br>Not Separable |
| Manufacturer Name                | IKO                                                                                       |
| Weight / Kilogram                | 0                                                                                         |
| Bore Diameter (mm)               | 6                                                                                         |
| Outer Diameter (mm)              | 9                                                                                         |
| Minimum Buy Quantity             | N/A                                                                                       |
| Harmonized Tariff Code           | 8482.99.65.30                                                                             |
| Manufacturer Item<br>Number      | KT6910C3                                                                                  |
| Number of Rows of<br>Rollers     | Single Row                                                                                |
| Basic static load rating<br>(C0) | 2,66 kN                                                                                   |
| Basic dynamic load<br>rating (C) | 3,01 kN                                                                                   |