


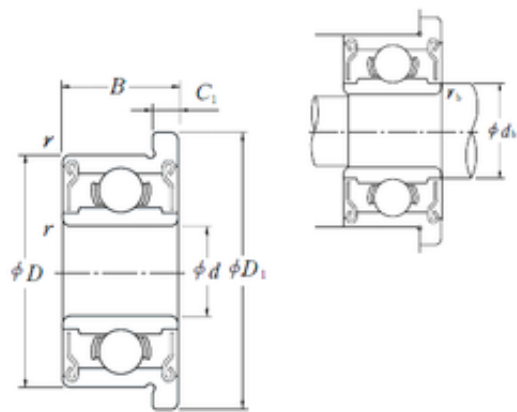

Bearing No. F607DD

C	2.34
d	7 mm
D	19 mm
B	6 mm
B1	6
db	9.1
Cr	238
D_	19
C0	0.885
C2	1.5
fo	12.041
B_	6
rb	0.3
C1	1,5 mm
Z_	6
D1	22 mm
D2	22
r1	0.3
DE_	16
D_1	22
C_1	1.5
DI_	9
DA_	3.5
SRE	1.96
C0r	90
SRI	1.8
SDM_	12.5
SRIX	0.015
SREX	0.03
SRIN	-0.015

KBRG	619
mass	8.66
SREN	0
yobi	F607DD
LangID	1
Weight	8,66 Kg
r min.	0,3 mm
db max.	9,1 mm
GRS rpm	32000
hidYobi	F607DD
rb max.	0,3 mm
hidTable	ecat_NSESBMF
Size (mm)	7x22x6
Prod_Type3	ESM_MD_WF_DD
Width (mm)	6
Bearing number	F607DD
Bore Diameter (mm)	7
Outer Diameter (mm)	22
Basic static load rating (C0)	885 kN
Basic dynamic load rating (C)	2340 kN