


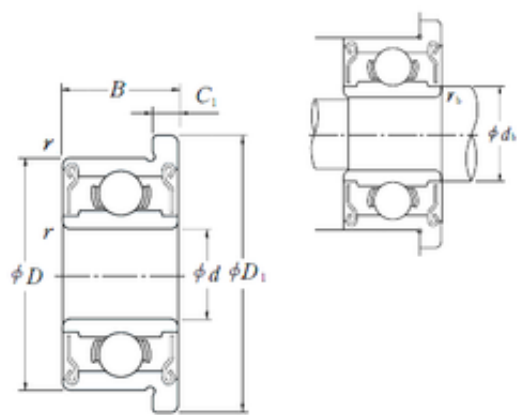

Bearing No. F608VV

C	3.3
d	8 mm
D	22 mm
B	7 mm
B1	7
db	10.5
Cr	335
D_	22
C0	1.37
C2	1.5
fo	12.424
B_	7
rb	0.3
C1	1,5 mm
Z_	7
D1	25 mm
D2	25
r1	0.3
DE_	18.969
D_1	25
C_1	1.5
DI_	11.031
DA_	3.969
SRE	2.22
C0r	140
SRI	2.04
SDM_	15
SRIX	0.015
SREX	0.03
SRIN	-0.015

KBRG	6151
mass	13.5
SREN	0
yobi	F608VV
LangID	1
Weight	13,5 Kg
r min.	0,3 mm
db max.	10,5 mm
GRS rpm	34000
hidYobi	F608VV
rb max.	0,3 mm
hidTable	ecat_NSESBMF
Size (mm)	8x25x7
Prod_Type3	ESM_MD_WF_VV
Width (mm)	7
Bearing number	F608VV
Bore Diameter (mm)	8
Outer Diameter (mm)	25
Basic static load rating (C0)	1370 kN
Basic dynamic load rating (C)	3300 kN