


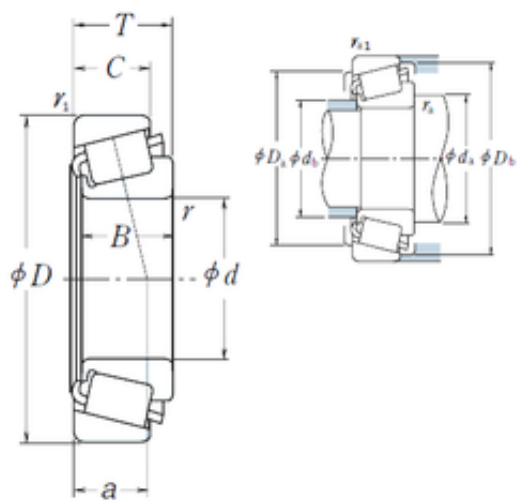

Bearing No. 43118/43300

e	0.67
d	30,162 mm
D	76,2 mm
T	24,608 mm
B	24,074 mm
C	16,67 mm
a	22,9 mm
Da	64 mm
B_	24.074
Db	73 mm
da	45 mm
Y0	0.49
db	42 mm
C0	69.5
D_	76.2
Z_	13
C_	16.67
Y1	0.9
DE_	65.5
SLR	15.8
D_a	64
DI_	44.24
DA1	12.305
DA2	10.129
CUP	0.146
DA_	11.234
D_b	73
RAr	88.228
SDM_	54.948
KBRG	3161

yobi	43118/43300
CONE	0.383
ALP21	48
ALP22	0
ALP23	0
BETA_	4
BET21	8
BET23	0
BET22	0
r min.	1,5 mm
LangID	1
Weight	0,529 Kg
ALPHA_	24
r1 min.	3,3 mm
ra max.	1,5 mm
Oil rpm	6700
outer r	C3.3
hidYobi	43118/43300
GRS rpm	5000
inner r	1.5
hidTable	ecat_NSTPRI
inner ra	1.5
outer rb	3.3
ra1 max.	3,3 mm
Size (mm)	30.162x76.2x24.608
SHOG_yobi	43118R/43300R
Prod_Type3	TRBSR_ID_A
Width (mm)	24,608
Bearing number	43118/43300
Bore Diameter (mm)	30,162
Outer Diameter (mm)	76,2
Calculation factor (e)	0,67

(Oil) Lubrication Speed	6700 r/min
Calculation factor (Y0)	0,49
(Grease) Lubrication Speed	5000 r/min
Basic static load rating (C0)	69,5 kN
Basic dynamic load rating (C)	67,5 kN