


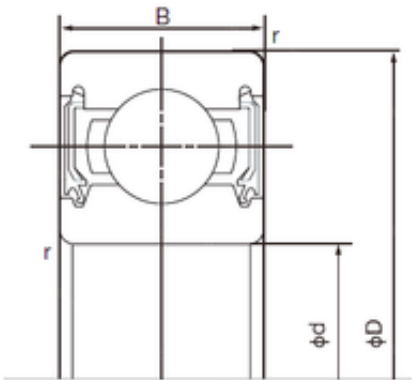

Bearing No. 6212-2NSE

D	110 mm
d	60 mm
B	22 mm
C	22 mm
Noun	Bearing
Bore	2.362 Inch 60 Millimeter
Width	22 mm
Weight	0.783 Kg
UNSPSC	31171504
r min.	1.5 mm
da min.	69 mm
Da max.	101 mm
ra max.	1.5 mm
Category	Single Row Ball Bearing
ra (max)	1.5 mm
da (min)	69 mm
Da (max)	101 mm
Factor fo	14.3
Size (mm)	60x110x22
Inventory	0.0
Bore Size	60 mm
Bore Type	Cylindrical Bore
Enclosure	2 Seals
Snap Ring	No
Width (mm)	22
Configuration	Single Row
Inch - Metric	Metric
Cage Material	Steel
Product Group	B00308

Bearing number	6212-2NSE
Enclosure Type	Contact Seal
Other Features	Deep Groove
Keyword String	Ball
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Radial Clearance	0.008 to 0.028 mm
Outside Diameter	4.331 Inch 110 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Outer Race Width	0.866 Inch 22 Millimeter
Manufacturer URL	http://www.nachiamerica.com
Long Description	60MM Bore; 110MM Outside Diameter; 22MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage;
Weight / Kilogram	0
Manufacturer Name	NACHI
Static Load Rating	36,000 N
Bore Diameter (mm)	60
Internal Clearance	C0-Medium
Outer Diameter (mm)	110
Dynamic Load Rating	52,500 N
Minimum Buy Quantity	N/A
Fillet Radius/Chamfer	1.5 mm
Harmonized Tariff Code	8482.10.50.68
Limiting Speed - Grease	3,800 rpm
Internal Special	No

Features	
Basic dynamic load rating (C)	52,5 kN
Basic static load rating (C0)	36 kN
Maximum Capacity / Filling Slot	No