


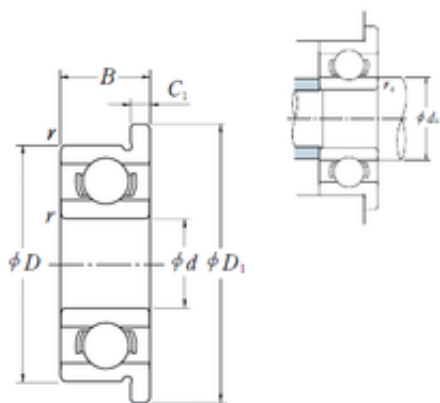

Bearing No. F605

C	1.33
r	0.2
d	5 mm
D	14 mm
B	5 mm
B0	5
D_	14
ra	0.2
Cr	135
C0	0.505
fo	12.725
da	6.6
C1	1 mm
D1	16 mm
Z_	7
B_	5
DE_	11.881
D_1	16
DA_	2.381
C_1	1
SRE	1.33
DI_	7.119
C0r	52
SRI	1.33
SREX	0.02
SRIX	0.02
SREN	0
SDM_	9.5
KBRG	6101
yobi	F605

SRIN	0
mass	3.9
LangID	1
Weight	3,9 Kg
r min.	0,2 mm
hidYobi	F605
GRS rpm	40000
Oil rpm	50000
ra max.	0,2 mm
da min.	6,6 mm
hidTable	ecat_NSESBMF
Size (mm)	5x16x5
Prod_Type3	ESM_MD_WF_OT
Width (mm)	5
Bearing number	F605
Bore Diameter (mm)	5
Outer Diameter (mm)	16
(Grease) Lubrication Speed	40000 r/min
Basic static load rating (C0)	505 kN
Basic dynamic load rating (C)	1330 kN