


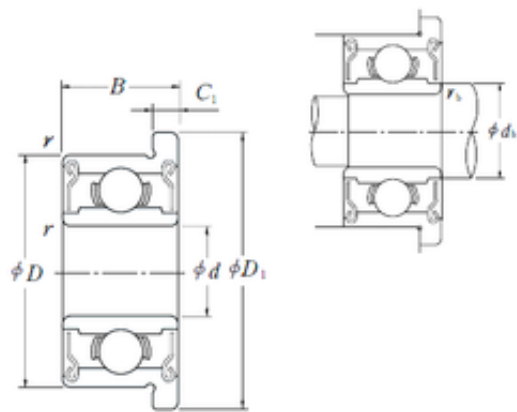

Bearing No. F605DD

|      |        |
|------|--------|
| C    | 1.33   |
| d    | 5 mm   |
| D    | 14 mm  |
| B    | 5 mm   |
| B1   | 5      |
| db   | 6.9    |
| Cr   | 135    |
| D_   | 14     |
| C0   | 0.505  |
| C2   | 1      |
| fo   | 12.725 |
| B_   | 5      |
| rb   | 0.2    |
| C1   | 1 mm   |
| Z_   | 7      |
| D1   | 16 mm  |
| D2   | 16     |
| r1   | 0.2    |
| DE_  | 11.881 |
| D_1  | 16     |
| C_1  | 1      |
| DI_  | 7.119  |
| DA_  | 2.381  |
| SRE  | 1.33   |
| C0r  | 52     |
| SRI  | 1.33   |
| SDM_ | 9.5    |
| SRIX | 0.02   |
| SREX | 0.02   |
| SRIN | 0      |
|      |        |

|                               |              |
|-------------------------------|--------------|
| KBRG                          | 619          |
| mass                          | 3.85         |
| SREN                          | 0            |
| yobi                          | F605DD       |
| LangID                        | 1            |
| Weight                        | 3,85 Kg      |
| r min.                        | 0,2 mm       |
| db max.                       | 6,9 mm       |
| GRS rpm                       | 38000        |
| hidYobi                       | F605DD       |
| rb max.                       | 0,2 mm       |
| hidTable                      | ecat_NSESBMF |
| Size (mm)                     | 5x16x5       |
| Prod_Type3                    | ESM_MD_WF_DD |
| Width (mm)                    | 5            |
| Bearing number                | F605DD       |
| Bore Diameter (mm)            | 5            |
| Outer Diameter (mm)           | 16           |
| Basic static load rating (C0) | 505 kN       |
| Basic dynamic load rating (C) | 1330 kN      |