


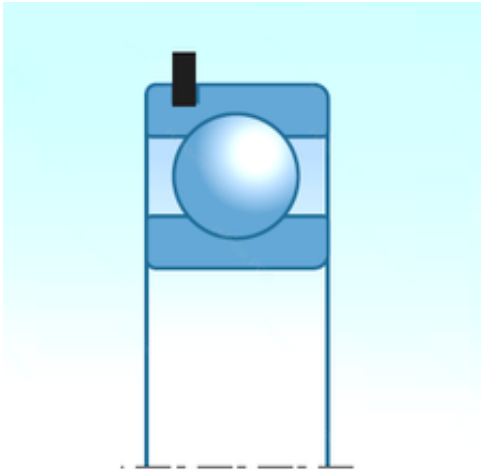

Bearing No. 6212LLUNR

D	110,000 mm
C	22,000 mm
B	22,000 mm
d	60,000 mm
Noun	Bearing
Bore	2.362 Inch 60 Millimeter
UNSPSC	31171504
Category	Single Row Ball Bearing
Snap Ring	Yes
Inventory	0.0
Enclosure	2 Seals
Size (mm)	60x110x22
Width (mm)	22,000
bore type:	Round
Weight / LBS	1.73
closure type:	Double Sealed
Inch - Metric	Metric
Cage Material	Steel
Product Group	B00308
Bearing number	6212LLUNR
Keyword String	Ball
bore diameter:	60 mm
cage material:	Steel
overall width:	22 mm
Other Features	Deep Groove Double Lip Friction Nitrile Rubber Seal With Snap Ring -20 To 120 Deg C Shell Alvania Prelubricated
Enclosure Type	Contact Seal

fillet radius:	1.5 mm
Precision Class	ABEC 1 ISO P0
finish/coating:	Uncoated
Rolling Element	Ball Bearing
Long Description	60MM Bore; 110MM Outside Diameter; 22MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage
Outside Diameter	4.331 Inch 110 Millimeter
Outer Race Width	0.866 Inch 22 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Manufacturer URL	http://www.ntnamerica.com
outer ring width:	22 mm
Weight / Kilogram	0
outside diameter:	110 mm
precision rating:	ISO Class 0
inner ring width:	22 mm
Manufacturer Name	NTN
bearing material:	High Carbon Chrome Steel
Bore Diameter (mm)	60,000
Internal Clearance	C0-Medium
snap ring included:	With Snap Ring
internal clearance:	CN
Outer Diameter (mm)	110,000
Minimum Buy Quantity	N/A
row type & fill slot:	Single Row Non-Fill Slot

maximum rpm (grease):	3800 rpm
static load capacity:	36000 N
dynamic load capacity:	52500 N
Harmonized Tariff Code	8482.10.50.68
Internal Special Features	No
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Maximum Capacity / Filling Slot	No