


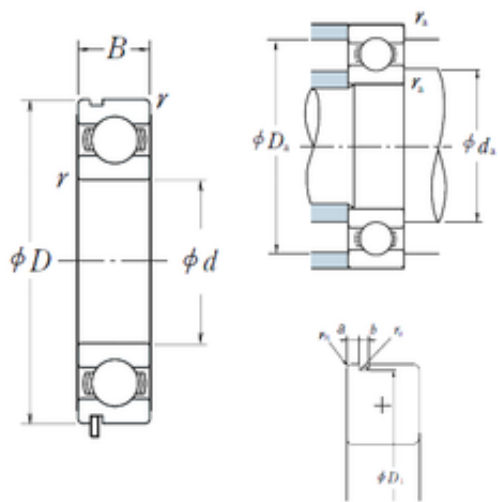

Bearing No. 6212N

a	3,28 mm
r	1.5
d	60 mm
D	110 mm
B	22 mm
C	22 mm
b	2,7 mm
fo	14.3
B_	22
ra	1.5
C0	36
D1	106,81 mm
D_	110
Z_	10
rn	0,5 mm
ro	0.6
DE_	102.375
SRI	8.22
D_a	102
DA_	15.875
SRE	8.22
DI_	70.625
yobi	6212N
mass	0.783
SBRG	2
bomp	0
KBRG	6101
SREX	0.03
SREN	-0.03
SRIN	-0.03

SDM_	86.5
SRIX	0.03
ALPHA_	0
r min.	1,5 mm
C_conv	52500
da max	74,5 mm
da min	68
Weight	0,783 Kg
LangID	1
ra max.	1,5 mm
Da max.	102 mm
Oil rpm	7100
da min.	68 mm
r0 max.	0,6 mm
hidYobi	6212N
GRS rpm	5600
hidTable	ecat_NSRDGB
Size (mm)	60x110x22
Prod_Type3	DGBB_SR_N_OT
Width (mm)	22
Bearing number	6212N
Bore Diameter (mm)	60
Outer Diameter (mm)	110
(Oil) Lubrication Speed	7 100 r/min
(Grease) Lubrication Speed	5 600 r/min
Basic dynamic load rating (C)	52,5 kN
Basic static load rating (C0)	36 kN