


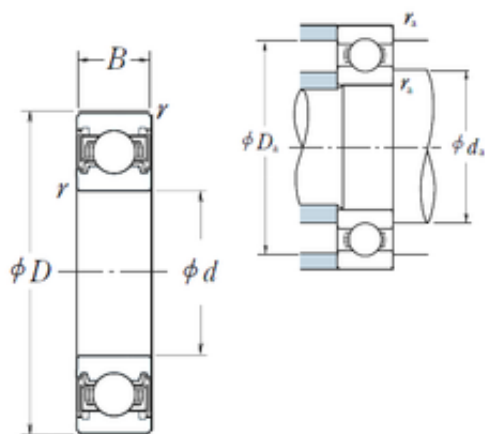

Bearing No. 6212VV

D	110 mm
d	60 mm
B	22 mm
C	22 mm
r	1.5
Z_	10
B_	22
D_	110
ra	1.5
C0	36
fo	14.3
DI_	70.625
SRI	8.22
D_a	102
DE_	102.375
DA_	15.875
SRE	8.22
SRIN	-0.03
SBRG	2
yobi	6212VV
SDM_	86.5
SREX	0.03
KBRG	6151
bomp	0
mass	0.783
Bore	2.362 Inch 60 Millimeter
SRIX	0.03
SREN	-0.03
Noun	Bearing

ALPHA_	0
da min	68
LangID	1
r min.	1,5 mm
UNSPSC	31171504
C_conv	52500
da max	74,5 mm
Weight	0,783 Kg
hidYobi	6212VV
Da max.	102 mm
da min.	68 mm
ra max.	1,5 mm
GRS rpm	5600
hidTable	ecat_NSRDGB
Category	Single Row Ball Bearing
Inventory	0.0
Enclosure	2 Seals
Snap Ring	No
Size (mm)	60x110x22
Width (mm)	22
Prod_Type3	DGBB_SR_VV
Weight / LBS	0.785
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
Bearing number	6212VV
Keyword String	Ball
Enclosure Type	Non-Contact Seal
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outer Race Width	0.866 Inch 22 Millimeter
Outside Diameter	4.331 Inch 110

	Millimeter
Long Description	60MM Bore; 110MM Outside Diameter; 22MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Manufacturer URL	http://www.nskamericas.com
Weight / Kilogram	0.77
Manufacturer Name	NSK
Internal Clearance	C0-Medium
Bore Diameter (mm)	60
Outer Diameter (mm)	110
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	6212VV
Internal Special Features	No
(Grease) Lubrication Speed	5 600 r/min
Basic static load rating (C0)	36 kN
Basic dynamic load rating (C)	52,5 kN
Maximum Capacity / Filling Slot	No