


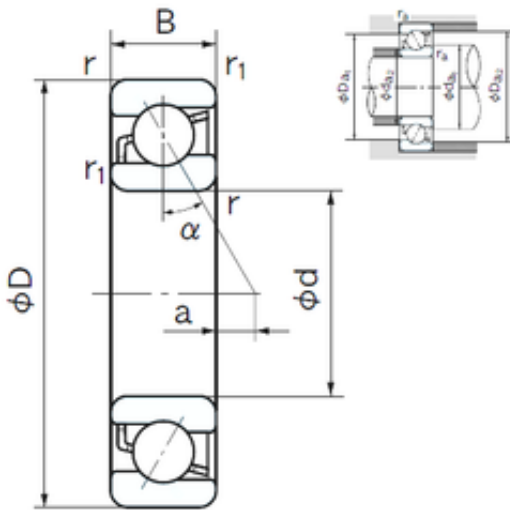

Bearing No. 7315C

a	-4.9 mm
d	75 mm
D	160 mm
B	37 mm
C	37 mm
r1	1.1 mm
a -	4.9 mm
Width	37 mm
Weight	3.15 Kg
r min.	2.1 mm
ra max.	2 mm
Da max.	148 mm
da min.	87 mm
r1 min.	1.1 mm
ra (max)	2 mm
Da1 (max)	148 mm
Da2 (max)	153 mm
da2 (min)	87 mm
da1 (min)	87 mm
Size (mm)	75x160x37
Enclosure	Open
Bore Type	Cylindrical Bore
Bore Size	75 mm
ra1 (max)	1 mm
Width (mm)	37
Configuration	Single Row
Bearing number	7315C
Angle (?)	15 °
Outside Diameter	160 mm
Static Load Rating	104,000 N

Bore Diameter (mm)	75
Dynamic Load Rating	138,000 N
Outer Diameter (mm)	160
Limiting Speed - Oil	9,400 rpm
Fillet Radius/Chamfer	2.1 mm
Limiting Speed - Grease	6,800 rpm
(Grease) Lubrication Speed	6800 r/min
Basic static load rating (C0)	104 kN
Basic dynamic load rating (C)	138 kN