


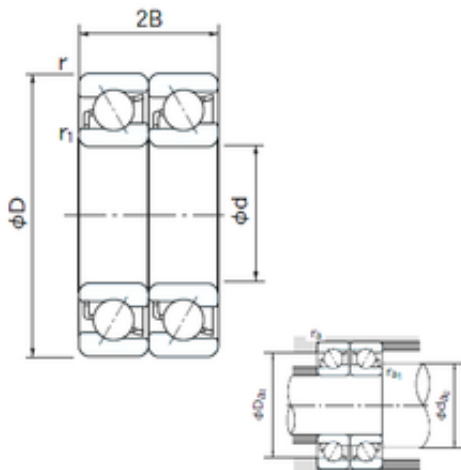

Bearing No. 7315CDT

C	37 mm
d	75 mm
B	37 mm
D	160 mm
r1	1.1 mm
2B	74 mm
a -	4.9 mm
Width	37 mm
r min.	2.1 mm
Weight	3.15 Kg
ra max.	1 mm
r1 min.	1.1 mm
da min.	87 mm
Da max.	153 mm
ra (max)	2 mm
da1 (min)	87 mm
Bore Size	75 mm
Enclosure	Open
Bore Type	Cylindrical Bore
ra1 (max)	1 mm
Size (mm)	75x160x37
da2 (min)	87 mm
Da2 (max)	153 mm
Da1 (max)	148 mm
Width (mm)	37
Configuration	Duplex
Bearing number	7315CDT
Angle (?)	15 °
Outside Diameter	160 mm
Static Load Rating	209,000 N

Bore Diameter (mm)	75
Dynamic Load Rating	225,000 N
Outer Diameter (mm)	160
Limiting Speed - Oil	7,500 rpm
Fillet Radius/Chamfer	2.1 mm
Limiting Speed - Grease	5,400 rpm
(Grease) Lubrication Speed	5400 r/min
Basic dynamic load rating (C)	225 kN
Basic static load rating (C0)	209 kN