


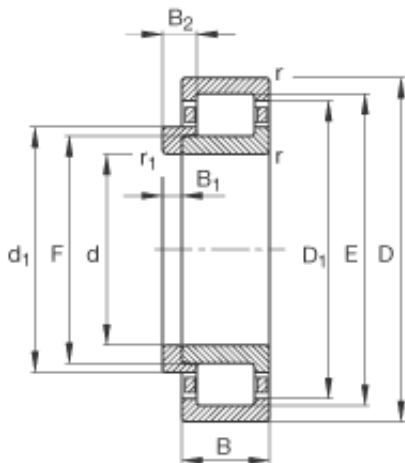

Bearing No. NJ203-E-TVP2 + HJ203-E

m	0,07 kg / Weight
F	22,1 mm
E	35,1 mm
d	17 mm
D	40 mm
B	12 mm
s	1,2 mm / Axial displacement facility from central position
Size (mm)	17x40x12
Width (mm)	12
C _r	20800 N / Dynamic load rating (radial)
m ₁	0,0080 kg
B ₂	5,5 mm
d ₁	24,7 mm
D ₁	32,5 mm
B ₁	3 mm
n _G	22900 1/min / Limiting speed
n _B	15400 1/min / Reference speed
C _{0r}	14600 N / Static load rating (radial)
Bearing number	NJ203-E-TVP2 + HJ203-E
C _{ur}	2180 N / Fatigue limit load, radial
r _{min}	0,6 mm
r _{a max}	0,6 mm
r _{1 min}	0,3 mm

$d_{a\ min}$	21 mm
$d_{a\ max}$	21,5 mm
$D_{a\ max}$	36 mm
$d_{c\ min}$	28 mm
Bore Diameter (mm)	17
Outer Diameter (mm)	40
- HJ203-E / Designation, L-section ring	HJ203E / Designation, Lsection ring