


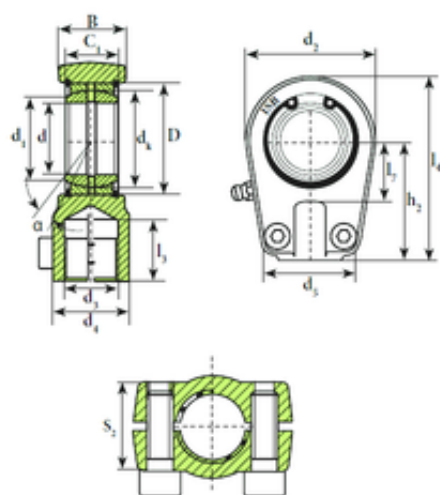

Bearing No. TAPR 550 U

|                               |            |
|-------------------------------|------------|
| d                             | 50 mm      |
| B                             | 40 mm      |
| D                             | 68 mm      |
| h2                            | 105 mm     |
| C1                            | 35 mm      |
| d1                            | 56,0 mm    |
| d2                            | 116 mm     |
| d4                            | 61 mm      |
| dk                            | 60 mm      |
| d5                            | 90 r/min   |
| S2                            | 37 mm      |
| Angle                         | 6 °        |
| Weight                        | 3,8 Kg     |
| l7 min.                       | 55 mm      |
| l3 min.                       | 46 mm      |
| l4 max.                       | 168 mm     |
| Thread (G)                    | M45x1,5    |
| Bearing number                | TAPR 550 U |
| Bore Diameter (mm)            | 50         |
| Basic dynamic load rating (C) | 156 kN     |