


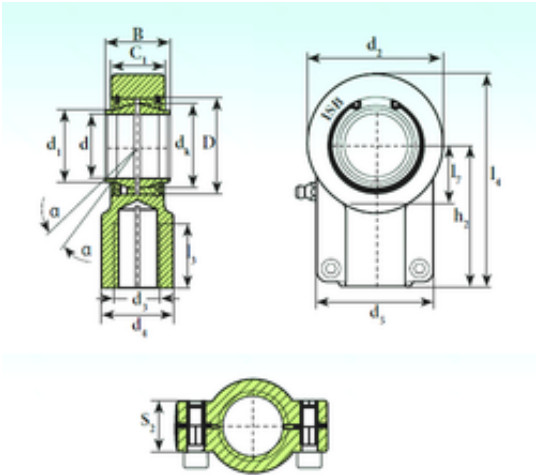

Bearing No. TAPR 650 CE

|                               |             |
|-------------------------------|-------------|
| D                             | 75 mm       |
| d                             | 50 mm       |
| B                             | 50 mm       |
| h2                            | 120 mm      |
| d2                            | 109 mm      |
| S2                            | 32 mm       |
| C1                            | 41 mm       |
| dk                            | 66 mm       |
| d4                            | 58 mm       |
| d1                            | 57 mm       |
| d5                            | 96 r/min    |
| Angle                         | 4 °         |
| Weight                        | 3,96 Kg     |
| l3 min.                       | 57 mm       |
| l4 max.                       | 179 mm      |
| l7 min.                       | 50 mm       |
| Bolt (G)                      | M12x35      |
| Size (mm)                     | 50x75x50    |
| Width (mm)                    | 50          |
| Thread (G)                    | M42x2       |
| Bearing number                | TAPR 650 CE |
| Bore Diameter (mm)            | 50          |
| Outer Diameter (mm)           | 75          |
| Basic dynamic load rating (C) | 156 kN      |