


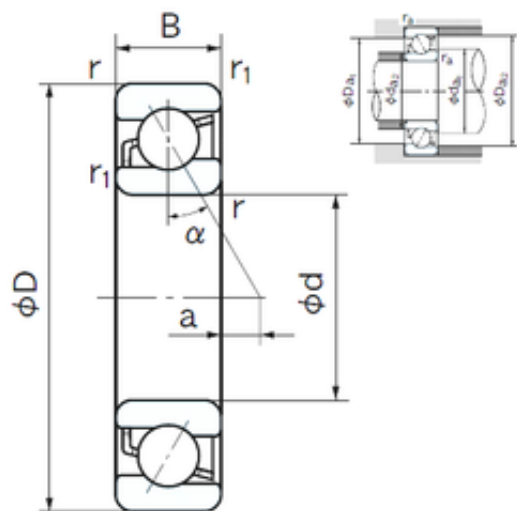

Bearing No. 7213

D	120 mm
d	65 mm
B	23 mm
C	23 mm
a	15.2 mm
r1	1 mm
Width	23 mm
Weight	1.02 Kg
r min.	1.5 mm
ra max.	1.5 mm
Da max.	111 mm
da min.	74 mm
r1 min.	1 mm
ra (max)	1.5 mm
Da1 (max)	111 mm
Da2 (max)	114.6 mm
da2 (min)	70 mm
da1 (min)	74 mm
Size (mm)	65x120x23
Enclosure	Open
Bore Type	Cylindrical Bore
Bore Size	65 mm
ra1 (max)	1 mm
Width (mm)	23
Configuration	Single Row
Bearing number	7213
Angle (?)	30 °
Outside Diameter	120 mm
Static Load Rating	57,800 N
Bore Diameter (mm)	65

Dynamic Load Rating	70,000 N
Outer Diameter (mm)	120
Limiting Speed - Oil	6,500 rpm
Fillet Radius/Chamfer	1.5 mm
Limiting Speed - Grease	4,900 rpm
(Grease) Lubrication Speed	4900 r/min
Basic static load rating (C0)	57,8 kN
Basic dynamic load rating (C)	70 kN